



NAME **Tim Wahl**  
 RACE **ETS Round #1**  
 TRACK **AMCC Apeldoorn**  
 COUNTRY **Netherlands** CLASS **Mod**

DATE **28.-31.05.2026** TEMP. °C AIR / TRACK **22 /**  
 TRACK SURFACE ASPHALT  CARPET   
 TRACK LAYOUT TECHNICAL  MIXED  FAST   
 TRACTION LOW  MEDIUM  HIGH

### FRONT

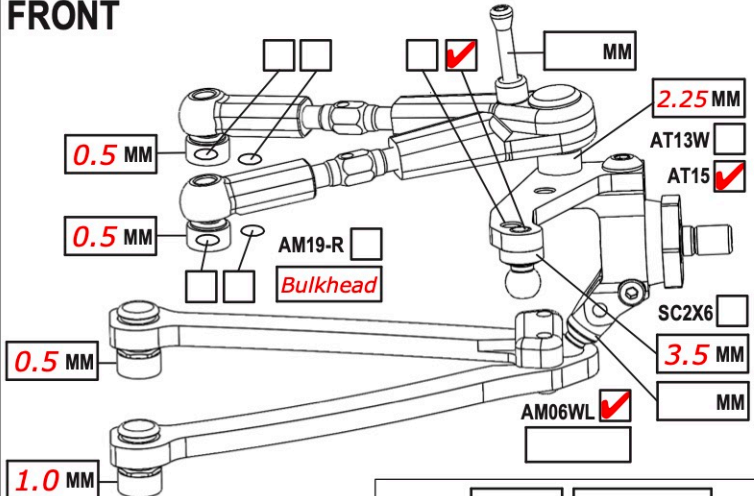


CAMBER ANGLE / ° **1.0**  
 CASTER ANGLE / ° **4.0**  
 TOE ANGLE / ° **1.0**  
 RIDE HEIGHT / MM **4.8**  
 DOWNSTOP / MM **6.0**  
 UPSTOP / MM **-**  
 ANTI-ROLL BAR Ø / MM **1.1**  
 ARB STIFFENER 1/4  1/2  3/4  1   
 LOWER ARM EXTENSION / MM **0**  
 STEER. ARM AM14LS   
 2ND SPRING SPR-P2  P1   
 WHEEL SPACER / MM **-**  
 DRIVE SPOOL  DIFF   
 DRIVE POSITION DOWN  UP  +1   
 DIFF OIL  DIFF SHIMS

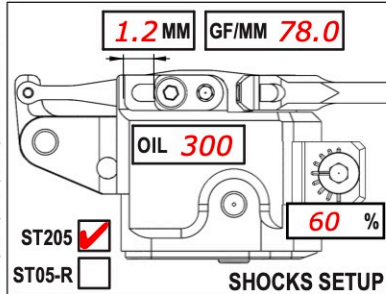


SHOCKS SETUP  
 DAMPER D4   
 ROTOR 2 HOLES   
 SPRING STD  S   
 SRS/RHS ARR. I  II   
 PSS SETUP 30%  25%  15%   
 DAMPING LINEAR  P1  P2   
 DAMPER SPACER / MM **1.0**  
 C45 YES  NO




### REAR

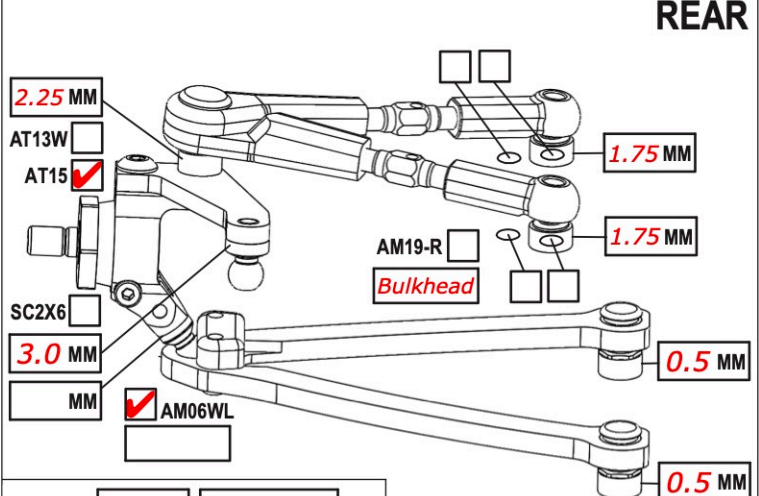

CAMBER ANGLE / ° **1.0**  
 CASTER ANGLE / ° **-3.0**  
 TOE ANGLE / ° **2.25**  
 RIDE HEIGHT / MM **5.2**  
 DOWNSTOP / MM **4.8**  
 UPSTOP / MM **-**  
 ANTI-ROLL BAR Ø / MM **1.1**  
 ARB STIFFENER 1/4  1/2  3/4  1   
 LOWER ARM EXTENSION / MM **0**  
 STEER. ARM AM23-1   
 2ND SPRING SPR-P2  P1   
 WHEEL SPACER / MM **-**  
 DRIVE SPOOL  DIFF   
 DRIVE POSITION DOWN  UP  +1   
 DIFF OIL **9.000** DIFF SHIMS

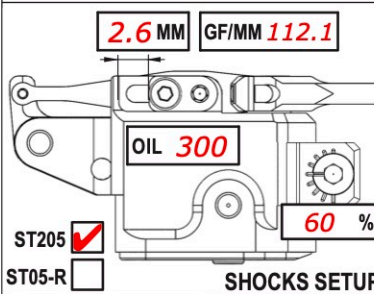

SHOCKS SETUP  
 DAMPER D4   
 ROTOR 2 HOLES   
 SPRING STD  S   
 SRS/RHS ARR. I  II   
 PSS SETUP 30%  25%  15%   
 DAMPING LINEAR  P1  P2   
 DAMPER SPACER / MM **1.0**  
 C45 YES  NO

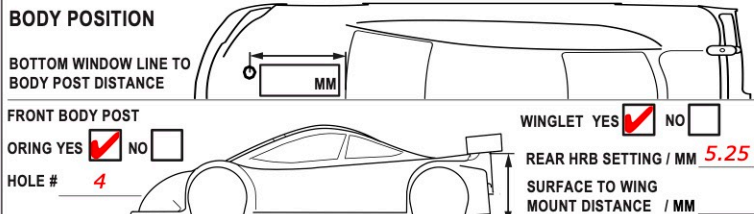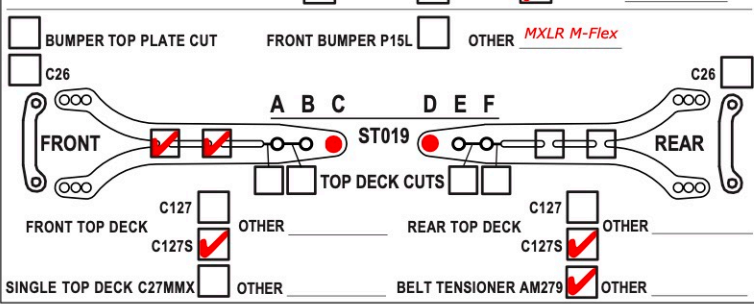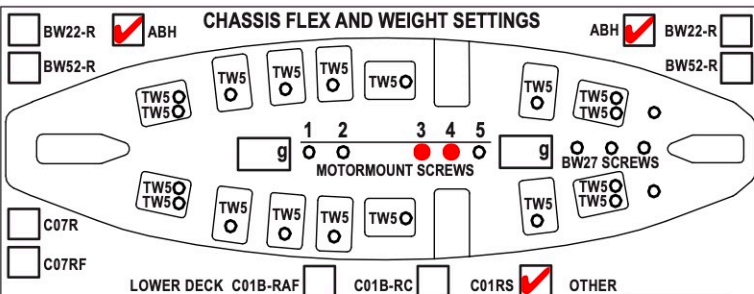

TIRES **Matrix**  
 INSERTS **std.**  
 SIDE WALLS GLUE Ø / MM F R  
 ADDITIVE **MR33 Outdoor** TIME MIN. F **15** R **15**  
 TOTAL WEIGHT **1308** WEIGHT DISTRIBUTION % F R  
 NOTES: **2x additive / frist time without towel**

MOTOR LATERAL SHIFT / MM **0.5** SERVO **Highest**  
 MOTOR **Hobbywing 4.5t** SERVOHORN / HEIGHT **17.25mm**  
 SPUR **114** PINION **30** RATIO **7.22** ACKERMANN POSITION **backwards**  
 BODY **Avalon 0.5** STEER TRAVEL IN **25** OUT  
 WING **Wolverine** BATTERY **EAM 6400**  
 ESC **Hobbywing XR10 pro** RECEIVER **Sanwa**  
 ESC SETTING RADIO **Sanwa**  
 BEST LAPTIME **13.3** QUALIF./FINAL POSITION /

COMMENTS:  
 - Long Links used (on Bulkhead)  
 - Hudy oil used  
 - MXLR servo arm 17.5mm  
 - Option parts used: AT15 / SB3x5AL  
 - MXLR Front + Rear Body Support