



NAME **Stuart Mason - Steel**
 COUNTRY **USA**
 RACE **2025 West Coast Nationals**
 TRACK **Finishline**

DATE _____ TEMP. °C AIR / TRACK /
 TRACK SURFACE ASPHALT ☐ CARPET ☐
 TRACK LAYOUT TECHNICAL ☐ MIXED ☐ FAST ☐
 TRACTION LOW ☐ MEDIUM ☐ HIGH ☐

FRONT

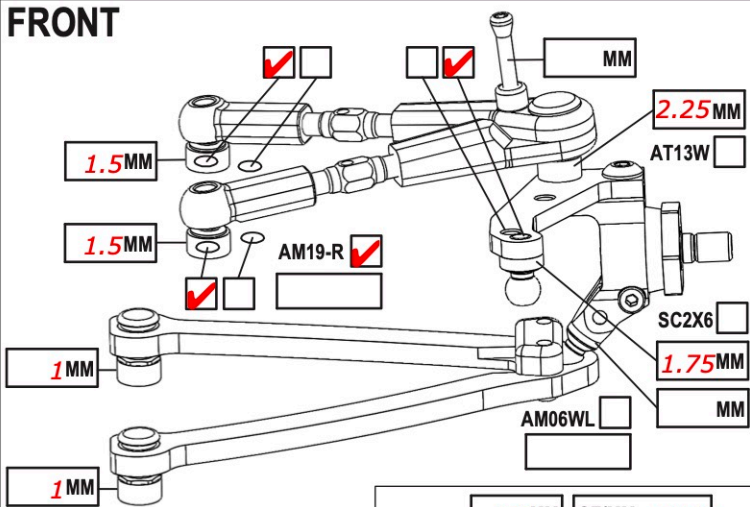


CAMBER ANGLE / ° **1.75**
 CASTER ANGLE / ° **4**
 TOE ANGLE / ° **1**
 RIDE HEIGHT / MM **4.6**
 DOWNSTOP / MM **6.0**
 ANTI-ROLL BAR Ø / MM **1.2**
 ARB STIFFENER 1/4 ☐ 1/2 ☐ 3/4 ☐ 1 ☐
 LOWER ARM EXTENSION **0MM**
 STEER. ARM AM14LS ☒
 WHEEL SPACER / MM
 DRIVE SPOOL ☒ DIFF ☐
 DRIVE POSITION UP ☒ DOWN ☐
 DIFF OIL ☐ DIFF SHIMS ☐



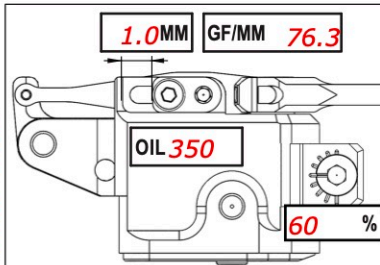


SHOCKS SETUP
 DAMPER D3 ☒ **+1mm**
 ROTOR 2 HOLES ☒
 SPRING STD ☒ S ☐
 SRS/RHS ARR. I ☒ II ☐
 PSS SETUP 25% ☐ 15% ☐
 DAMPING LINEAR ☒ PROGRESSIVE ☐
 C45 YES ☐ NO ☒
 2ND SPRING SPR-P1 ☐

REAR

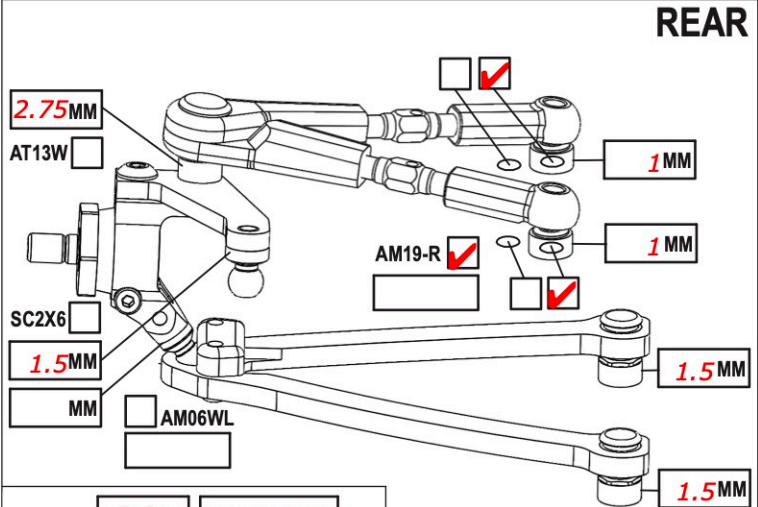

CAMBER ANGLE / ° **1.75**
 CASTER ANGLE / ° **4**
 TOE ANGLE / ° **3**
 RIDE HEIGHT / MM **4.8**
 DOWNSTOP / MM **5.6**
 ANTI-ROLL BAR Ø / MM **1.2**
 ARB STIFFENER 1/4 ☐ 1/2 ☐ 3/4 ☐ 1 ☐
 LOWER ARM EXTENSION **0MM**
 STEER. ARM AM23-R ☐ **23-1**
 WHEEL SPACER / MM
 DRIVE (surprise us) **Diff**
 DRIVE POSITION UP ☒ DOWN ☐
 DIFF OIL **8k** DIFF SHIMS **Kit**

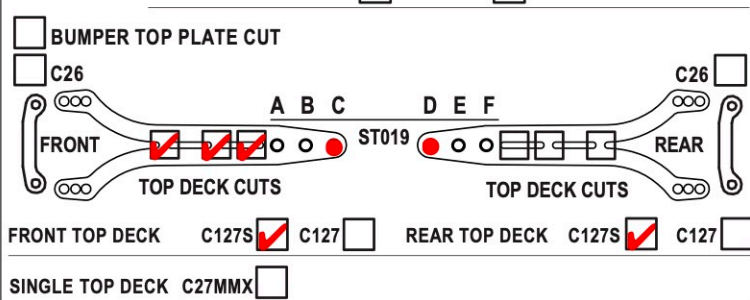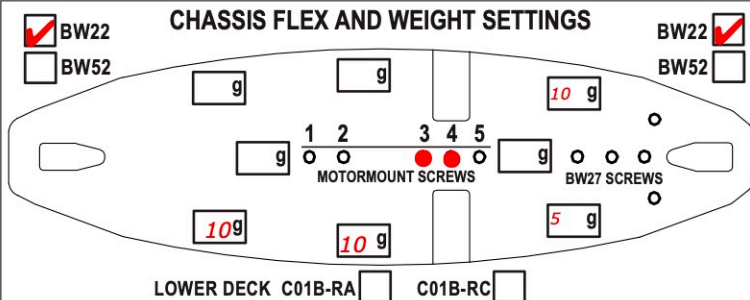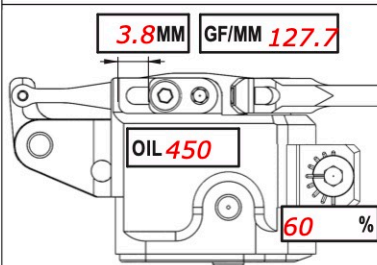

TIRES **Sweep 36D**
 INSERTS
 WHEELS
 ADDITIVE **MGY** TIME - FR RR
 TOTAL WEIGHT **1330** WEIGHT DISTRIBUTION F % R %
 NOTES:

MOTOR LATERAL SHIFT / MM
 MOTOR **HW 5.0**
 SPUR **110** PINION **28** RATIO **7.46**
 BODY **Speciale**
 WING **Speciale - 0.75mm**
 ESC **HW XR10 G3**
 ESC SETTING
 BEST LAP TIME
 ACKERMANN SHIMS / MM **Forward**
 SERVO **MKS HBL575SL**
 STEER TRAVEL IN OUT
 BATTERY **EAM 5000**
 RECEIVER **RX493**
 RADIO **M17S**
 QUALIF./FINAL POSITION /

COMMENTS:
CO1B-RS, Ti hardware, AT15, ST05-R, BW10
Starting setup for Fresno: Add motor mount screw 5, move bellcrank back, damper valves to 90% F, 100% R