AWESOMATIX A800RR — SETUP SHEET

NAME	Olivier Bultynck	DATE	04-07/09
COUNTRY	Lux	TEMP. °C AIR / TRACK	/
RACE	ETS Rd3	TRACK SURFACE	ASPHALT ✔ CARPET ☐
TRACK	LMCC	TRACK LAYOUT	TECHNICAL ☐ MIXED ✔ FAST ✔
		TRACTION	LOW ☐ MEDIUM ✔ HIGH ☐

FRONT

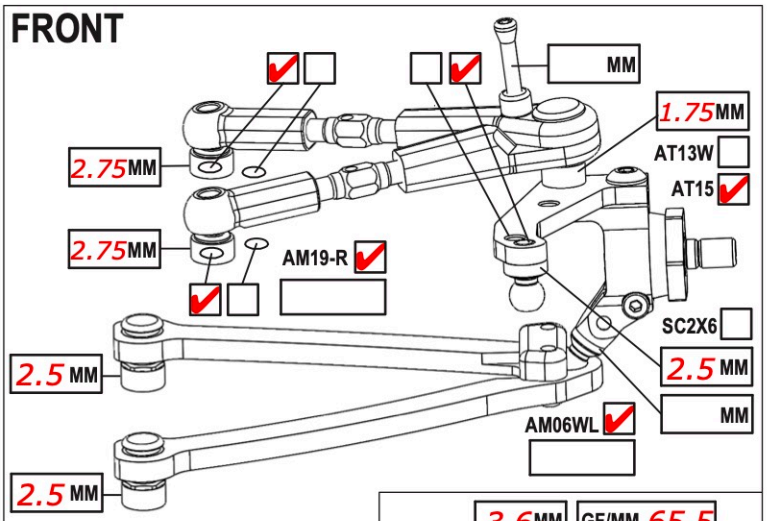

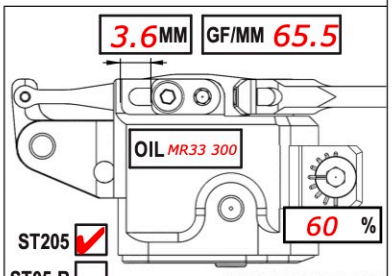

CAMBER ANGLE / °	1.5
CASTER ANGLE / °	4.0
TOE ANGLE / °	1.2
RIDE HEIGHT / MM	4.6
DOWNSTOP / MM	5.8
ANTI-ROLL BAR Ø / MM	1.0
ARB STIFFENER 1/4 ☐ 1/2 ☐ 3/4 ☐ 1 ☐	
LOWER ARM EXTENSION / MM	0
STEER. ARM AM14LS ✔	
2ND SPRING SPR-P2 ☐ P1 ☐	
WHEEL SPACER / MM	
DRIVE SPOOL ✔ DIFF ☐	
DRIVE POSITION DOWN ☐ UP ✔ +1 ☐	
DIFF OIL	DIFF SHIMS

SHOCKS SETUP

DAMPER D4 ✔	
ROTOR 2 HOLES ✔	
SPRING STD ✔	S ☐
SRS/RHS ARR. I ☐	II ✔
PSS SETUP 30% ☐ 25% ☐ 15% ☐	
DAMPING LINEAR ☐ P1 ☐	P2 ✔
DAMPER SPACER / MM	
C45 YES ☐	NO ✔

REAR

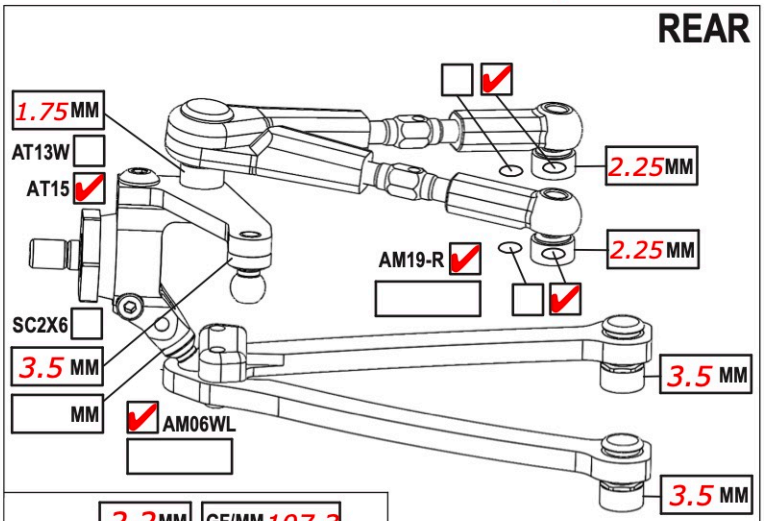

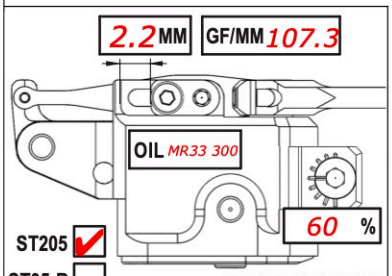

CAMBER ANGLE / °	2
CASTER ANGLE / °	-3
TOE ANGLE / °	2.9
RIDE HEIGHT / MM	4.8
DOWNSTOP / MM	4.6
ANTI-ROLL BAR Ø / MM	1.1
ARB STIFFENER 1/4 ☐ 1/2 ☐ 3/4 ☐ 1 ☐	
LOWER ARM EXTENSION / MM	0
STEER. ARM AM23-1 ✔	
2ND SPRING SPR-P2 ☐ P1 ☐	
WHEEL SPACER / MM	
DRIVE DIFF ✔	GD2B-R
DRIVE POSITION DOWN ☐ UP ✔ +1 ☐	
DIFF OIL 7000	DIFF SHIMS 5x7x0,4

SHOCKS SETUP

DAMPER D4 ✔	
ROTOR 2 HOLES ✔	
SPRING STD ✔	S ☐
SRS/RHS ARR. I ✔	II ☐
PSS SETUP 30% ☐ 25% ☐ 15% ☐	
DAMPING LINEAR ☐ P1 ☐	P2 ✔
DAMPER SPACER / MM	
C45 YES ✔	NO ☐

CHASSIS FLEX AND WEIGHT SETTINGS

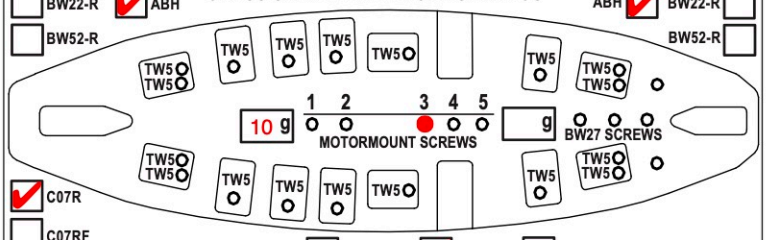

LOWER DECK C01B-RAF ☐ C01B-RC ✔ C01RS ☐ OTHER _____

BUMPER TOP PLATE CUT ☐ FRONT BUMPER P15L ☐ OTHER MXLR M-Flex

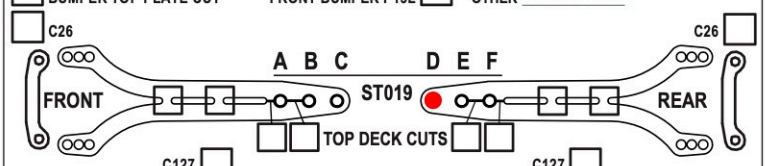

FRONT TOP DECK C127 ☐ C127S ☐ OTHER _____ REAR TOP DECK C127 ☐ C127S ☐ OTHER _____

SINGLE TOP DECK C27MMX ✔ OTHER _____ BELT TENSIONER AM279 ✔ OTHER _____

TIRES	ETS Matrix 36Z
INSERTS	
SIDE WALLS GLUE Ø / MM F R	
ADDITIVE	MR33 V3
TOTAL WEIGHT	1324
NOTES:	2times 80°C

TIME MIN. F 35 R 35

WEIGHT DISTRIBUTION % F 51 R 49

MOTOR LATERAL SHIFT / MM	1	SERVO	PowerHD GTS2
MOTOR	ETS HW G4R 17.5T	SERVOHORN / HEIGHT	MXLR 17mm
SPUR 90 PINION 45 RATIO 3.80		STEER TRAVEL IN 24 OUT	
BODY	Wolverine Max 0.4	BATTERY	Team EAM 8400
WING	Twister with Endplates	RECEIVER	FlySky FGr4D
ESC	ETS HW XR10 Stock Spec	RADIO	FlySky Noble Pro+
ESC SETTING	ETS RPM limit 21k		
BEST LAPTIME	19.621	QUALIF./FINAL POSITION	1 / 1

BODY POSITION

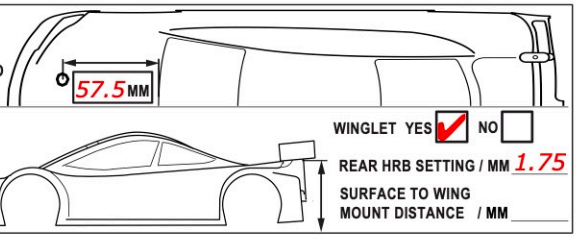

BOTTOM WINDOW LINE TO BODY POST DISTANCE

FRONT BODY POST

ORING YES ✔ NO ☐

HOLE # 3

WINGLET YES ✔ NO ☐

REAR HRB SETTING / MM 1.75

SURFACE TO WING MOUNT DISTANCE / MM _____

COMMENTS:

- Option Parts: AT15, SB3X5AL and SB3X7AL on top of the car, OR14V, AT144, BW7, BW8, ABH, C07R, ST24S, AT21-Ti, AT24S-Ti, ST24M-Ti, ST03-Ti, ST24-Ti
ST105 and 2x ST110 in front of Servo,
ST110 in front of Battery
- MXLR Parts: MAX-03-005, MAX-09-002, MAX-09-013, MAX-09-025, MAX-09-026