


NAME **Max Mächler**
 COUNTRY **Netherlands**
 RACE **EFRA EV Warm-up**
 TRACK **RACO2000**

DATE **13.07.2025**


TEMP. °C AIR / TRACK /

TRACK SURFACE ASPHALT ☐ CARPET ☐
 TRACK LAYOUT TECHNICAL ☐ MIXED ☐ FAST ☒
 TRACTION LOW ☒ MEDIUM ☒ HIGH ☐

FRONT


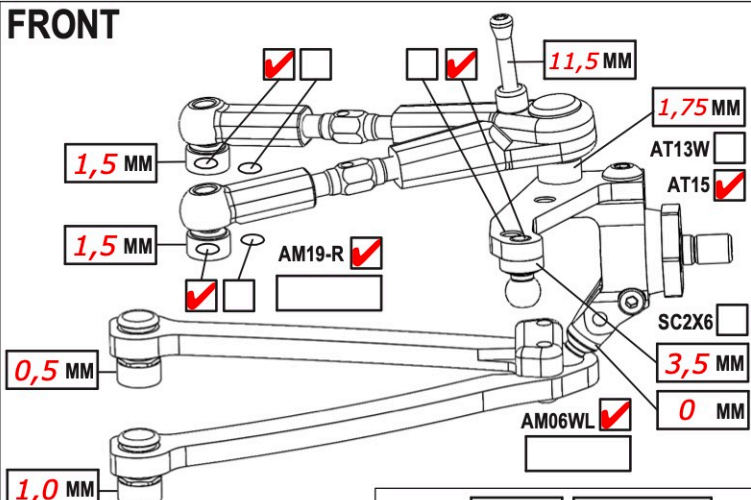


CAMBER ANGLE / ° **2**
 CASTER ANGLE / ° **4,0**
 TOE ANGLE / ° **1,0**
 RIDE HEIGHT / MM **4,6**
 DOWNSTOP / MM **5,6**
 ANTI-ROLL BAR Ø / MM **1,1**
 ARB STIFFENER 1/4 ☐ 1/2 ☐ 3/4 ☐ 1 ☐
 LOWER ARM EXTENSION / MM **0**
 STEER. ARM AM14LS ☒
 2ND SPRING SPR-P2 ☐ P1 ☐ -
 WHEEL SPACER / MM -
 DRIVE SPOOL ☒ DIFF ☐
 DRIVE POSITION DOWN ☒ UP ☐ +1 ☐
 DIFF OIL ☐ DIFF SHIMS ☐

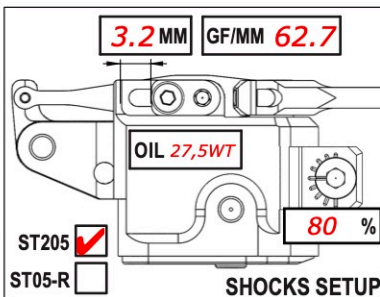



SHOCKS SETUP
 DAMPER D4 ☒
 ROTOR 2 HOLES ☒
 SPRING STD ☒ S ☐
 SRS/RHS ARR. I ☐ II ☒
 PSS SETUP 30% ☒ 25% ☐ 15% ☐
 DAMPING LINEAR ☐ P1 ☐ P2 ☒
 DAMPER SPACER / MM -
 C45 YES ☐ NO ☐

REAR

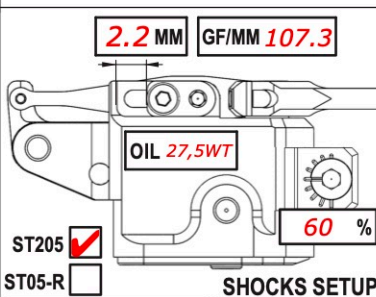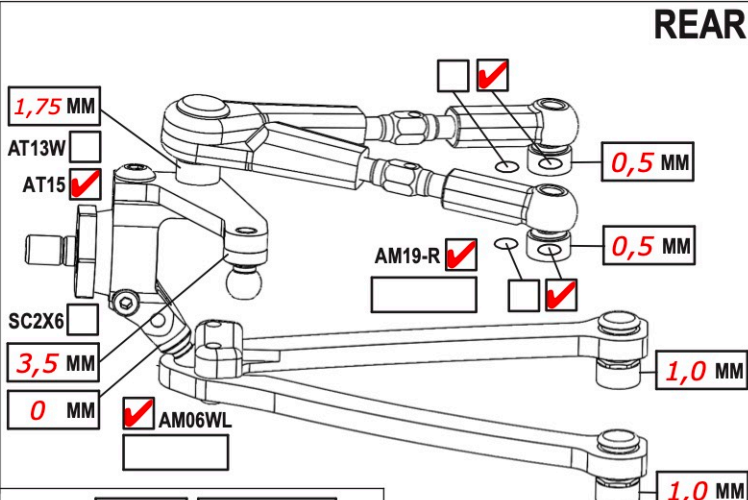

SHOCKS SETUP
 DAMPER D4 ☒
 ROTOR 2 HOLES ☒
 SPRING STD ☒ S ☐
 SRS/RHS ARR. I ☒ II ☐
 PSS SETUP 30% ☐ 25% ☐ 15% ☐
 DAMPING LINEAR ☒ P1 ☐ P2 ☐
 DAMPER SPACER / MM -
 C45 YES ☒ NO ☐

CAMBER ANGLE / ° **2**
 CASTER ANGLE / ° **-4 short**
 TOE ANGLE / ° **2,75**
 RIDE HEIGHT / MM **4,8**
 DOWNSTOP / MM **4,6**
 ANTI-ROLL BAR Ø / MM **1,1**
 ARB STIFFENER 1/4 ☐ 1/2 ☐ 3/4 ☐ 1 ☐
 LOWER ARM EXTENSION / MM **0**
 STEER. ARM AM23-1 ☒
 2ND SPRING SPR-P2 ☐ P1 ☐ -
 WHEEL SPACER / MM **0**
 DRIVE DIFF ☒
 DRIVE POSITION DOWN ☒ UP ☐ +1 ☐
 DIFF OIL **7,5K** DIFF SHIMS **SH5X7X0.4**

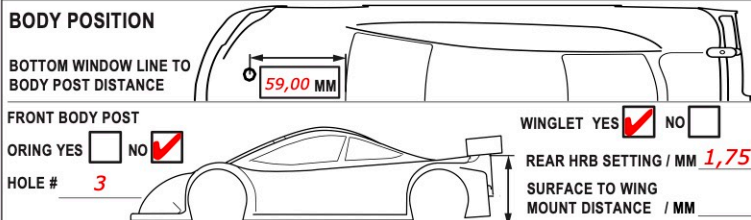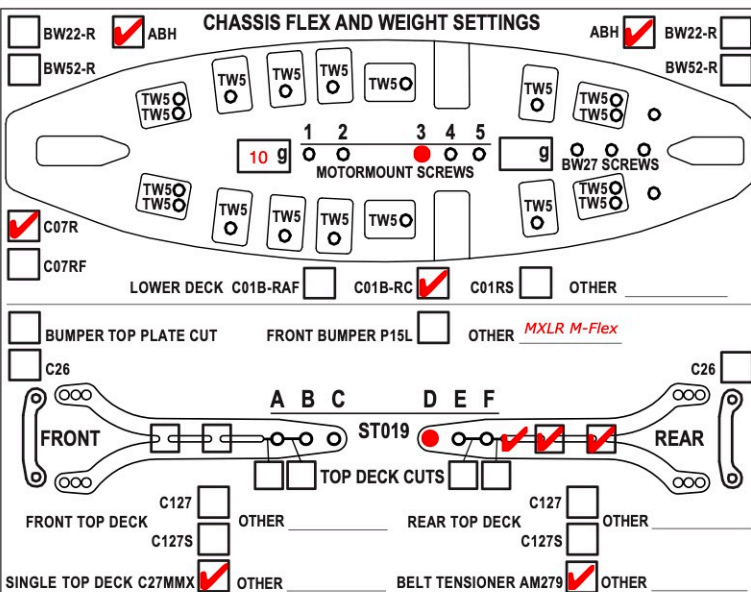

TIRES **RUSH 36**
 INSERTS **std.**

SIDE WALLS GLUE Ø / MM F - R -
 ADDITIVE **MR33 V3** TIME MIN. F **20** R **20**
 TOTAL WEIGHT **1320** WEIGHT DISTRIBUTION % F **50** R **50**

NOTES:

MOTOR LATERAL SHIFT / MM **1,75** SERVO **MKS HBL575 SL**
 MOTOR **Hobbywing G4R 13,5T** SERVOHORN / HEIGHT **MXLR 17mm**
 SPUR **100** PINION **47** RATIO **4.04** ACKERMANN POSITION **FORWARD**
 BODY **ZooRacing Wolverine 0,4** STEER TRAVEL IN **24** OUT
 WING **Twister 0,5** BATTERY **Team EAM 8400**
 ESC **Hobbywing XR10 Pro G3X** RECEIVER **Sanwa RX-493**
 ESC SETTING **Blinky** RADIO **Sanwa M17S**
 BEST LAPTIME **14,9** QUALIF./FINAL POSITION **1 / 1**

COMMENTS:

10g MXLR Tungsten on front Servo Case. 15g MXLR Tungsten under receiver.
 1x ST110 + 1x ST105 in front of Servo. 1x ST105 on receiver. 1x ST105 in front of Battery.

MXLR M-FlexBumper / MXLR Alloy Servo Arm / MXLR Front Body Support / MXLR Rear Body Support / OR14V / SB3X5AL / C27MMX