


This form has been optimized for use with Adobe Acrobat.
Use of alternative PDF readers may result in formatting, display, or data entry issues.


NAME	Daniel Hiesch		
RACE	RCK German championship		
TRACK	MOD O DROM		
COUNTRY	Germany	CLASS	17.5T

DATE	30.09.26		TEMP. °C	AIR / TRACK	/
TRACK SURFACE			ASPHALT	☒	CARPET ☐
TRACK LAYOUT	TECHNICAL	☒	MIXED	☐	FAST ☐
TRACTION	LOW	☒	MEDIUM	☒	HIGH ☐

FRONT

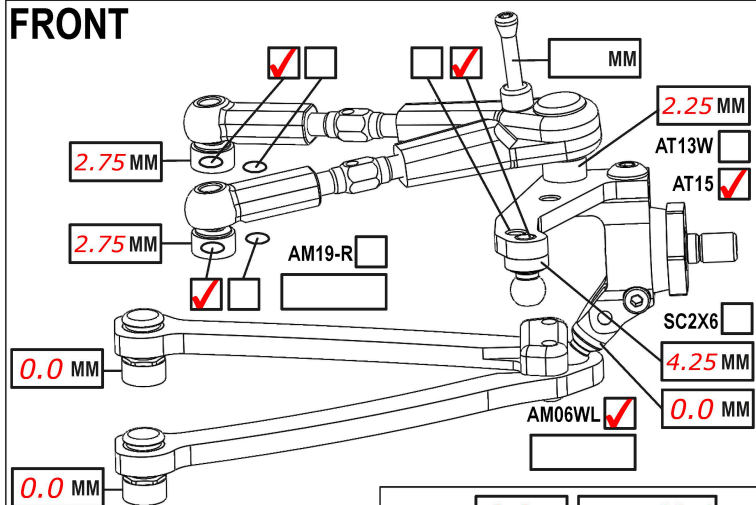


CAMBER ANGLE /°	2.0
CASTER ANGLE /°	4.0
TOE ANGLE /°	1.0
RIDE HEIGHT / MM	4.8
DOWNSTOP / MM	5.8
UPSTOP / MM	/
ANTI-ROLL BAR Ø / MM	1.0
ARB STIFFENER	1/4 ☐ 1/2 ☐ 3/4 ☐ 1 ☐
LOWER ARM EXTENSION / MM	0
STEER. ARM AM14LS	☒
2ND SPRING SPR-P2	☐ P1 ☐
WHEEL SPACER / MM	0.0
DRIVE	SPOOL ☒ DIFF ☐
DRIVE POS.	DOWN ☐ UP ☒ +1
DIFF OIL	DIFF SHIMS

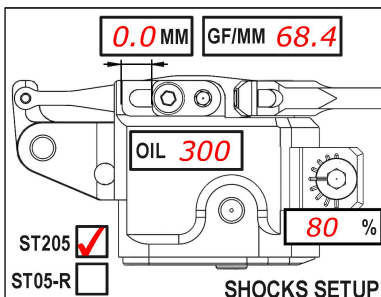

DAMPER	D4	☒		
ROTOR	2 HOLES	☒		
SPRING	STD	☒		S ☐
SRS/RHS ARR.	I	☒		II ☐
PSS SETUP	30%	☒	25% ☐	15% ☐
DAMPING LINEAR		☐	P1 ☐	P2 ☒
DAMPER SPACER / MM				0.5
C45	YES	☒		NO ☐

REAR

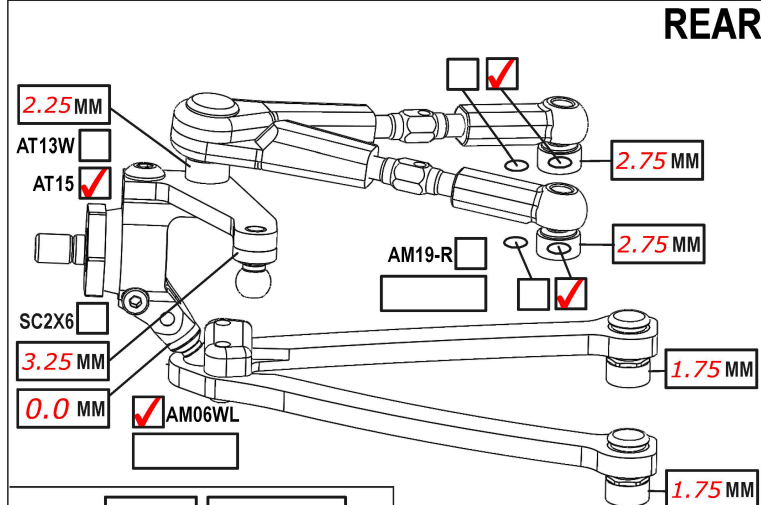




Diagram of a shock absorber with adjustment points labeled with dimensions and settings.

Dimensions: 1.4 MM, 98.4 GF/MM

Oil Level: OIL 300

Pressure: 80 %

SHOCKS SETUP

DAMPER D4 ☒

ROTOR 2 HOLES ☒

SPRING STD ☒ S ☐

SRS/RHS ARR. I ☒ II ☐



PSS SETUP 30% ☐ 25% ☐ 15% ☐

DAMPING LINEAR ☐ P1 ☐ P2 ☒

DAMPER SPACER / MM 0.5

C45 YES ☐ NO ☒

CAMBER ANGLE / °	2.0
CASTER ANGLE / °	3.0
TOE ANGLE / °	1.5
RIDE HEIGHT / MM	5.0
DOWNSTOP / MM	4.6
UPSTOP / MM	/
ANTI-ROLL BAR Ø / MM	1.0
ARB STIFFENER 1/4 ☐ 1/2 ☐ 3/4 ☐ 1 ☐	
LOWER ARM EXTENSION / MM	0
STEER. ARM AM23-1 ☐	AM23-R
2ND SPRING SPR-P2 ☐ P1 ☐	
WHEEL SPACER / MM	0.5
DRIVE DIFF ☒	GD2B-R
DRIVE POS. DOWN ☐ UP ☒ +1 ☐	
DIFF OIL 7000	DIFF SHIMS SH5X7X0.4

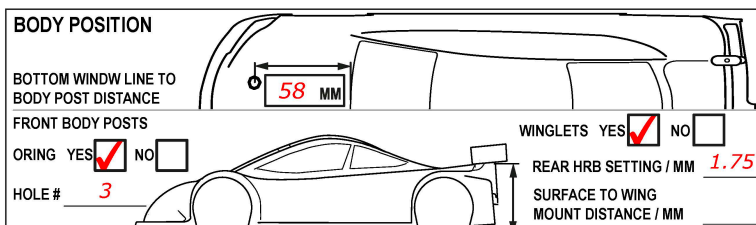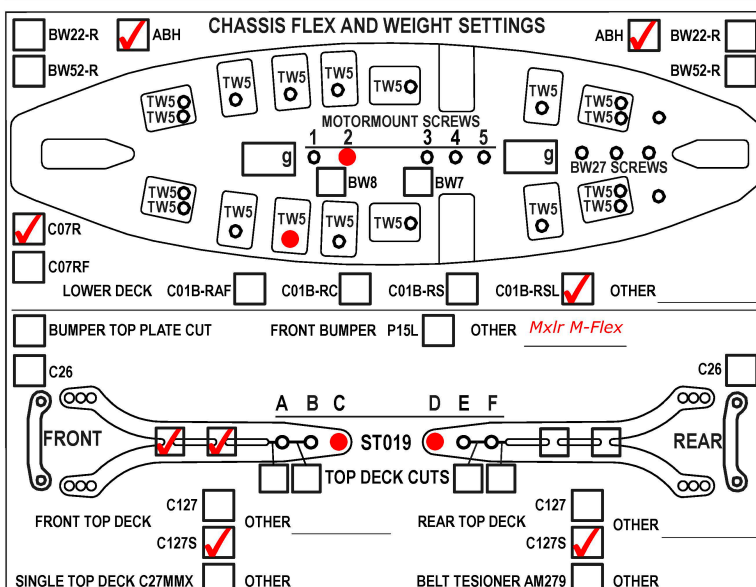

TIRES	<i>Rck</i>				
INSERTS					
SIDEWALLS GLUE Ø / MM	F / R /				
ADDITIVE	<i>Mr33</i>	TIME MIN.	F 25	R 25	
TOTAL WEIGHT	<i>1325</i>	WEIGHT DISTRIBUTION %	F 49.5	R 50.5	
NOTES:					

MOTOR LATERAL SHIFT / MM	1.75	SERVO	MKS HBL575 SL
MOTOR	RCK 17.5 V2	SERVO HORN / HEIGHT	Mxlr 17mm
SPUR 100 PINION 47 RATIO 4.04		ACKERMANN POSITION	Forward
BODY	Zooracing Wolverine 0.4	STEER. TRAVEL IN 24 OUT	
WING	Zooracing Wolverine 0.5	BATTERY	Team Eam 8000
ESC	Hobbywing xr10 pro G3	RECEIVER	Sanwa RX493i
ESC SETTINGS		RADIO	Sanwa M17
BEST LAP TIME	17.701	QUALIFY/FINAL POSITION	4 / 5

COMMENTS:

- Mxlr front body support*
- Mxlr rear body support*
- Mxlr Fanbooster*
- Mxlr servohorn*
- Mxlr M-Flex bumper*