


This form has been optimized for use with Adobe Acrobat.
Use of alternative PDF readers may result in formatting, display, or data entry issues.


NAME	<i>Daniel Hiesch</i>		
RACE	<i>Euro touring series</i>		
TRACK	<i>Andernach</i>		
COUNTRY	<i>Germany</i>	CLASS	<i>21.5T</i>

DATE	13.09.26		TEMP. °C	AIR / TRACK		20	/
TRACK SURFACE			ASPHALT	☒		CARPET	☐
TRACK LAYOUT	TECHNICAL	☒	MIXED	☒		FAST	☐
TRACTION	LOW	☒	MEDIUM	☒		HIGH	☐

FRONT

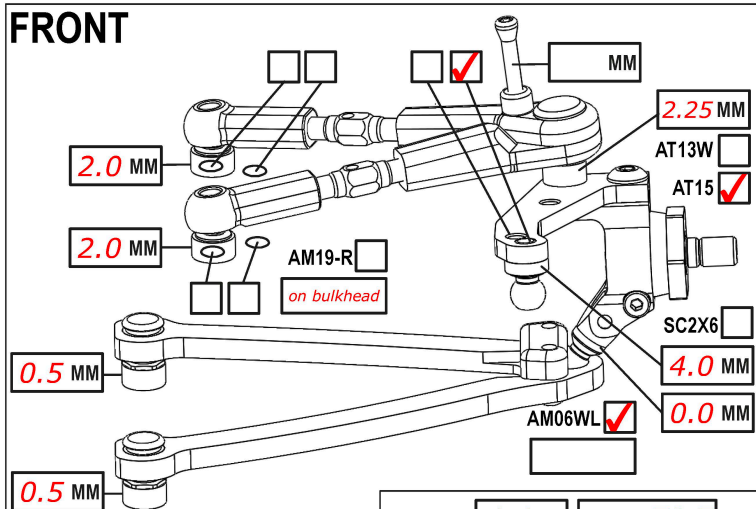



CAMBER ANGLE /°	1.0
CASTER ANGLE /°	4.0
TOE ANGLE /°	1.0
RIDE HEIGHT / MM	4.4
DOWNSTOP / MM	5.4
UPSTOP / MM	on plastic
ANTI-ROLL BAR Ø / MM	1.1
ARB STIFFENER	1/4 ☐ 1/2 ☐ 3/4 ☐ 1 ☐
LOWER ARM EXTENSION / MM	0
STEER. ARM AM14LS	☒
2ND SPRING SPR-P2	☐ P1 ☐
WHEEL SPACER / MM	
DRIVE	SPOOL ☐ DIFF ☐
DRIVE POS.	DOWN ☒ UP ☐ +1 ☐
DIFF OIL	DIFF SHIMS

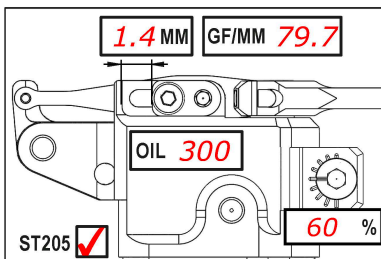

ST205	☒			60 %
ST05-R	☐	SHOCKS SETUP		
DAMPER	D4	☒		
ROTOR	2 HOLES	☒		
SPRING	STD	☒	S	☐
SRS/RHS ARR.	I	☒	II	☐
PSS SETUP	30%	☒	25% ☐	15% ☐
DAMPING LINEAR	☒	P1	☐	P2 ☐
DAMPER SPACER / MM				1.0
C45	YES	☐	NO	☒

REAR

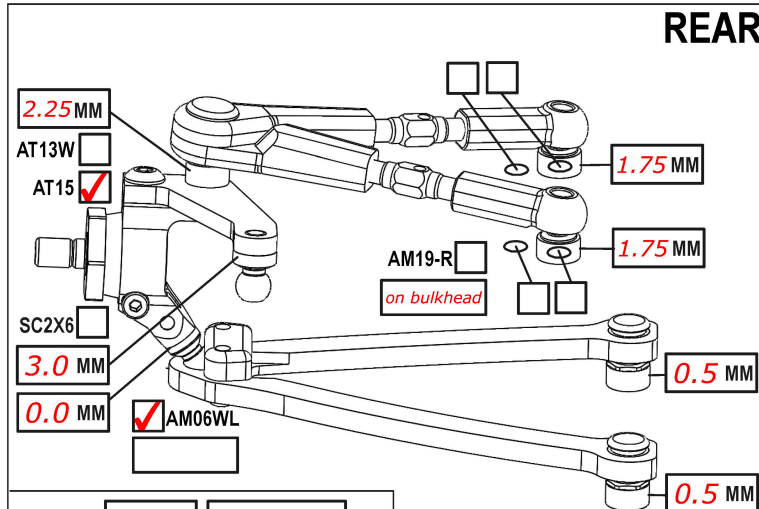



2.2 MM

107.3

OIL 300

60 %

ST205 ☒

ST05-R ☐

SHOCKS SETUP

DAMPER D4 ☒

ROTOR 2 HOLES ☒

SPRING STD ☒ S ☐

SRS/RHS ARR. I ☒ II ☐

PSS SETUP 30% ☐ 25% ☐ 15% ☐


DAMPING LINEAR ☒ P1 ☐ P2 ☐

DAMPER SPACER / MM 1.0


C45 YES ☒ NO ☐

CAMBER ANGLE /°	1.0
CASTER ANGLE /°	4.0
TOE ANGLE /°	2.25
RIDE HEIGHT / MM	4.6
DOWNSTOP / MM	4.6
UPSTOP / MM	on plastic
ANTI-ROLL BAR Ø / MM	1.1
ARB STIFFENER 1/4 ☐ 1/2 ☐ 3/4 ☐ 1 ☐	
LOWER ARM EXTENSION / MM	0
STEER. ARM AM23-1 ☒	
2ND SPRING SPR-P2 ☐ P1 ☐	
WHEEL SPACER / MM	(0.5 on new tires)
DRIVE DIFF ☒	
DRIVE POS. DOWN ☐ UP ☒ +1 ☐	
DIFF OIL 5000	DIFF SHIMS SH5X7X0.4

CHASSIS FLEX AND WEIGHT SETTINGS

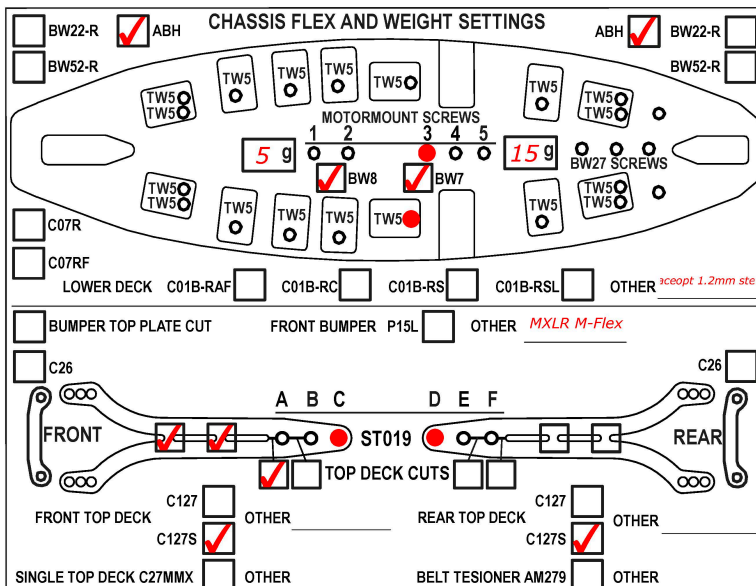

BODY POSITION	
1	1
2	2
3	3
4	4
5	5
6	6
7	7
8	8
9	9
10	10
11	11
12	12
13	13
14	14
15	15
16	16
17	17
18	18
19	19
20	20
21	21
22	22
23	23
24	24
25	25
26	26
27	27
28	28
29	29
30	30
31	31
32	32
33	33
34	34
35	35
36	36
37	37
38	38
39	39
40	40
41	41
42	42
43	43
44	44
45	45
46	46
47	47
48	48
49	49
50	50
51	51
52	52
53	53
54	54
55	55
56	56
57	57
58	58
59	59
60	60
61	61
62	62
63	63
64	64
65	65
66	66
67	67
68	68
69	69
70	70
71	71
72	72
73	73
74	74
75	75
76	76
77	77
78	78
79	79
80	80
81	81
82	82
83	83
84	84
85	85
86	86
87	87
88	88
89	89
90	90
91	91
92	92
93	93
94	94
95	95
96	96
97	97
98	98
99	99
100	100

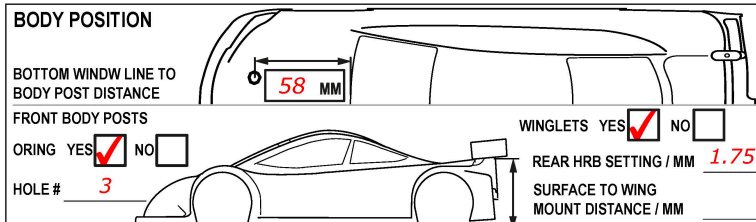

TIRES	Matrix Z36						
INSERTS							
SIDEWALLS GLUE Ø / MM	F	/	R	/			
ADDITIVE	MR33 V3		TIME MIN.	F	12	R	12
TOTAL WEIGHT	1327	WEIGHT DISTRIBUTION %	F	50.0	R	50.0	
NOTES:							

MOTOR LATERAL SHIFT / MM	1.75	SERVO	MKS HBL575 SL					
MOTOR	Hobbywing G4R 21.5	SERVO HORN / HEIGHT	17mm					
SPUR	94	PINION	47	RATIO	3.80	ACKERMANN POSITION	Forward	
BODY	Zooracing Wolverine 0.7	STEER. TRAVEL	IN	23-25	OUT			
WING	Zooracing Wolverine	BATTERY	Team Eam 6400					
ESC	Hobbywing stock G2	RECEIVER	Sanwa RX493i					
ESC SETTINGS			RADIO					M17
BEST LAP TIME			QUALIF./FINAL POSITION					/

COMMENTS:

*Plastic bumper plate
MXLR M-FlexBumper / MXLR Alloy Servo Arm /
MXLR Front Body Support /
MXLR Rear Body Support / MXLR FAN
BOOSTER/15g MXLR Tungsten in front of Servo.*