


This form has been optimized for use with Adobe Acrobat.

Use of alternative PDF readers may result in formatting, display, or data entry issues.


NAME	Max Mächler		
RACE	EFRA EC Warm-up		
TRACK	LMCC Luxembourg		
COUNTRY	Luxembourg	CLASS	13.5T

DATE	12.07.2026		TEMP. °C	AIR / TRACK		30	/	60
TRACK SURFACE			ASPHALT	☒		CARPET	☐	
TRACK LAYOUT	TECHNICAL	☐	MIXED	☒		FAST	☒	
TRACTION	LOW	☐	MEDIUM	☒		HIGH	☐	

FRONT

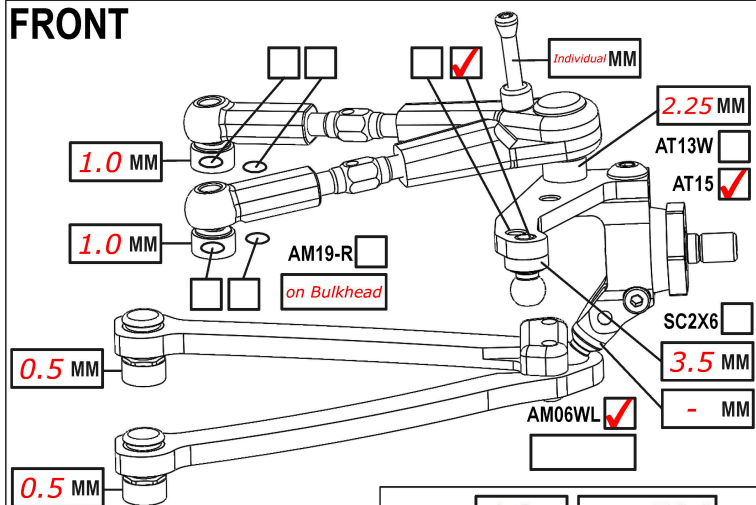


CAMBER ANGLE /°	1.0
CASTER ANGLE /°	4.0
TOE ANGLE /°	1.0
RIDE HEIGHT / MM	4.8
DOWNSTOP / MM	5.6
UPSTOP / MM	on plastic
ANTI-ROLL BAR Ø / MM	1.1
ARB STIFFENER	1/4 ☐ 1/2 ☐ 3/4 ☐ 1 ☐
LOWER ARM EXTENSION / MM	0
STEER. ARM AM14LS	☒
2ND SPRING SPR-P2	☐ P1 ☐
WHEEL SPACER / MM	-
DRIVE SPOOL	☒
DIFF	☐
DRIVE POS.	DOWN ☐ UP ☒ +1 ☐
DIFF OIL	DIFF SHIMS

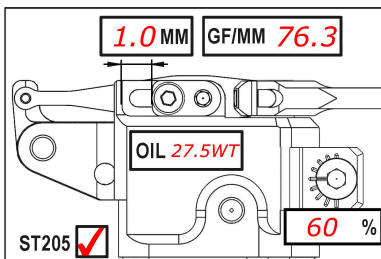

ST205	☒			60	%
ST05-R	☐				
SHOCKS SETUP					
DAMPER	D4	☒			
ROTOR	2 HOLES	☒			
SPRING	STD	☒			S ☐
SRS/RHS ARR.	I	☒			II ☐
PSS SETUP	30%	☒	25%	☐	15% ☐
DAMPING LINEAR		☐	P1 ☐	P2 ☒	
DAMPER SPACER / MM			<i>SH0.5</i>		
C45	YES	☐			NO ☒

REAR

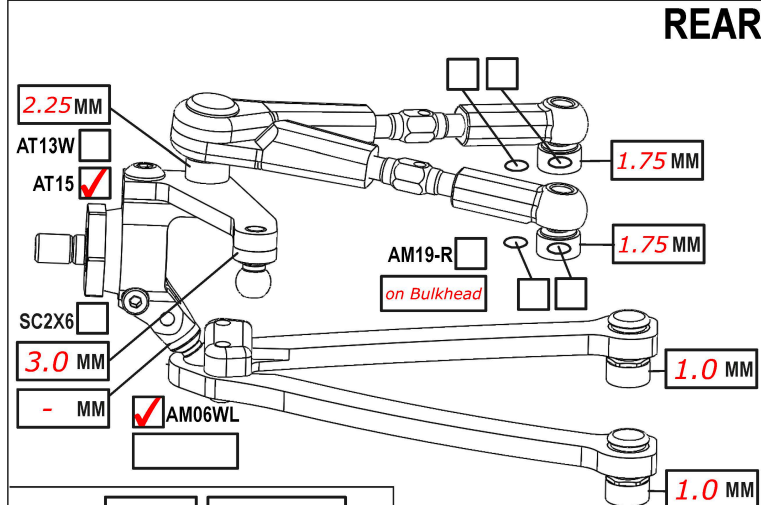




Diagram of the ST205 shock absorber showing dimensions and labels:

- Top dimension: 2.4 MM
- Right dimension: 109.7
- Label: OIL 30WT
- Adjustment knob label: 60 %

SHOCKS SETUP

DAMPER D4 ☒

ROTOR 2 HOLES ☒

SPRING STD ☒ S ☐

SRS/RHS ARR. I ☒ II ☐


PSS SETUP 30% ☐ 25% ☐ 15% ☐

DAMPING LINEAR ☒ P1 ☐ P2 ☐

DAMPER SPACER / MM SH0.5

C45 YES ☒ NO ☐

CAMBER ANGLE /°	1.0
CASTER ANGLE /°	-3
TOE ANGLE /°	3.0
RIDE HEIGHT / MM	5.2
DOWNSTOP / MM	4.6
UPSTOP / MM	on plastic
ANTI-ROLL BAR Ø / MM	1.1
ARB STIFFENER	1/4 ☐ 1/2 ☐ 3/4 ☐ 1 ☐
LOWER ARM EXTENSION / MM	0
STEER. ARM AM23-1	☒
2ND SPRING SPR-P2	☐ P1 ☐
WHEEL SPACER / MM	-
DRIVE DIFF	☒ GD2B-R
DRIVE POS.	DOWN ☐ UP ☒ +1 ☐
DIFF OIL	7.5k
DIFF SHIMS	SH5X7X0.4

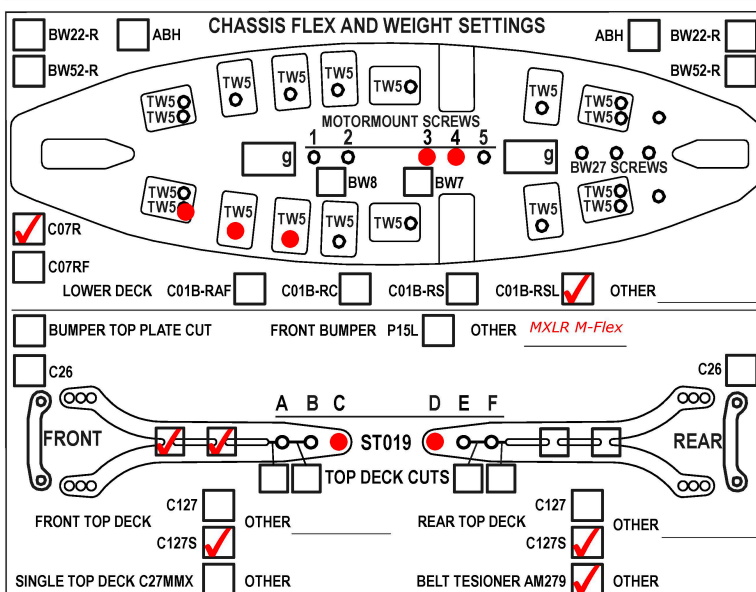

BODY POSITION

BOTTOM WINDOW LINE TO BODY POST DISTANCE

FRONT BODY POSTS

ORING YES ☒ NO ☐

HOLE # 3

WINGLETS YES ☒ NO ☐

REAR HRB SETTING / MM 3,5

SURFACE TO WING MOUNT DISTANCE / MM _____

TIRES	<i>Hudy A2-36</i>			
INSERTS				
SIDEWALLS GLUE Ø / MM	F	R		
ADDITIVE	<i>MR33 V3</i>		TIME MIN.	F <i>15</i> R <i>15</i>
TOTAL WEIGHT	<i>1320</i>	WEIGHT DISTRIBUTION %	F	R
NOTES:	<i>1 time additive / 75deg</i>			

MOTOR LATERAL SHIFT / MM	1.75	SERVO	MKS HBL575 SL				
MOTOR	Hobbywing G5 13,5T	SERVO HORN / HEIGHT	MXLR 17mm				
SPUR	96	PINION	44	RATIO	4.15	ACKERMANN POSITION	reward
BODY	ZooRacing Wolverine MAX 0.4mm	STEER. TRAVEL IN	22	OUT			
WING	Twister 0.5	BATTERY	Team EAM 9200				
ESC	Hobbywing G3X	RECEIVER	Sanwa RX493i				
ESC SETTINGS	Blinky	RADIO	Sanwa M17S				
BEST LAPTIME		QUALIF./FINAL POSITION	4	/	4		

COMMENTS:

15g. MXLR Tungsten under receiver / 15g MXLR Tungsten in front of Servo / MXLR M-FlexBumper / MXLR Alloy Servo Arm / MXLR Front Body Support / MXLR Rear Body Support / MXLR FAN BOOSTER

OR14V / SB3X5AL / C07R / AT144 / AM279 / FSS / AT21-Ti / BS1-Ti

AXON Oil in Diff & Dampers.