


TRACK SURFACE		ASPHALT	☐	CARPET	☒	
TRACK LAYOUT	TECHNICAL	☐	MIXED	☐	FAST	☒
TRACTION	LOW	☐	MEDIUM	☒	HIGH	☐

REAR



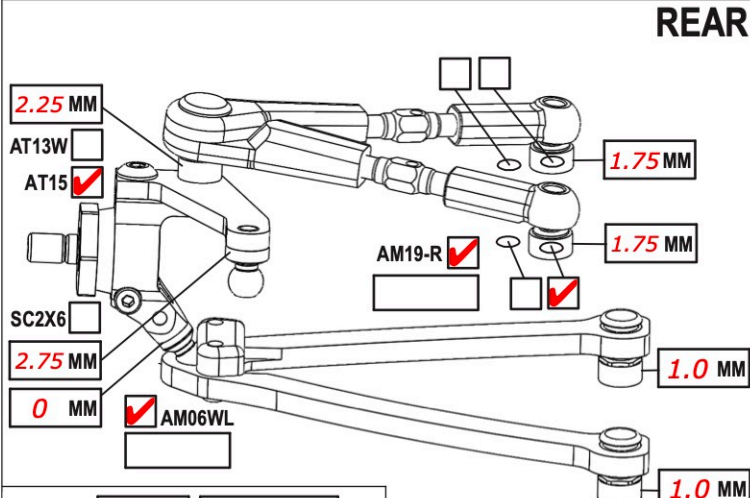

1.0 MM

GF/MM 60.8

OIL 300

60 %

ST205 ☒

ST05-R ☐

SHOCKS SETUP

DAMPER D4 ☒

ROTOR 2 HOLES ☒

SPRING STD ☐ S ☒

SRS/RHS ARR. I ☒ II ☐

PSS SETUP 30% ☐ 25% ☐ 15% ☐


DAMPING LINEAR ☐ P1 ☐ P2 ☒

DAMPER SPACER / MM

C45 YES ☐ NO ☒

3.0 MM

GF/MM 93.3



OIL 300

60 %

ST205 ☒

ST05-R ☐

SHOCKS SETUP

DAMPER	D4	☒
ROTOR	2 HOLES	☒
SPRING	STD	☐
SRS/RHS ARR.	I	☒
	II	☐
PSS SETUP	30%	☐
	25%	☐
	15%	☐
DAMPING	LINEAR	☐
	P1	☐
	P2	☒
DAMPER SPACER / MM		
C45	YES	☒
	NO	☐

CAMBER ANGLE / °	1.75
CASTER ANGLE / °	3.0
TOE ANGLE / °	2.5
RIDE HEIGHT / MM	5.2
DOWNSTOP / MM	4.6
ANTI-ROLL BAR Ø / MM	1.1
ARB STIFFENER 1/4 ☐ 1/2 ☐ 3/4 ☐ 1 ☐	
LOWER ARM EXTENSION / MM	0
STEER. ARM AM23-1 ☒	
2ND SPRING SPR-P2 ☐ P1 ☐	
WHEEL SPACER / MM	0
DRIVE DIFF ☒	
DRIVE POSITION DOWN ☒ UP ☐ +1 ☐	
DIFF OIL 10K DIFF SHIMS Small	



MOTOR LATERAL SHIFT / MM	0.5	SERVO	MKS HBL575SL
MOTOR	Hobbywing 5T (30°)	SERVOHORN / HEIGHT	17mm
SPUR ¹¹⁴ PINION ²⁹ RATIO	7.47	ACKERMANN POSITION	Rearward
BODY	Speciale 0.4	STEER TRAVEL IN ^{25,5°} OUT	
WING	Twister 0.5	BATTERY	Nosram 4200mAh
ESC	Hobbywing G3	RECEIVER	RX 492
ESC SETTING		RADIO	Sanwa M17
BEST LAPTIME	11,59	QUALIF./FINAL POSITION	3 / 2

SB3x5AL / C07R / AT15 / AT144

**SURFACE TO WING
MOUNT DISTANCE / MM**