



DATE 23-26.7.2026		TEMP. °C		AIR / TRACK 28 /	
TRACK SURFACE		ASPHALT ☒		CARPET ☐	
TRACK LAYOUT		TECHNICAL ☐		MIXED ☒	
TRACTION		LOW ☒		HIGH ☐	

REAR

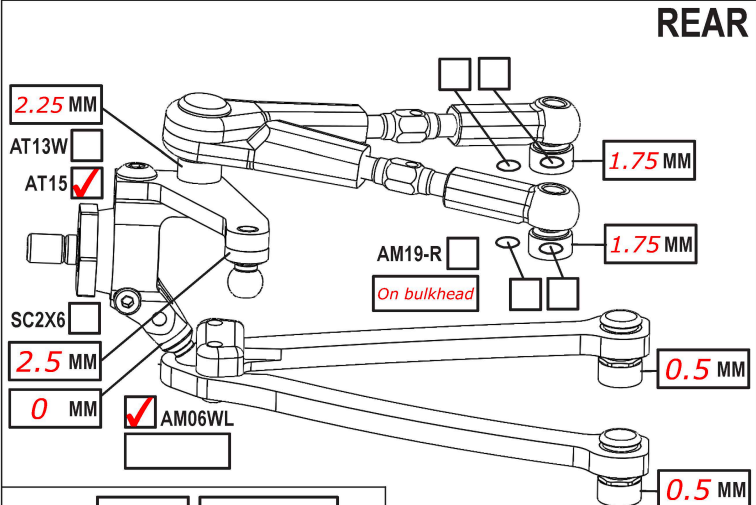



CAMBER ANGLE / °	1
CASTER ANGLE / °	3
TOE ANGLE / °	2.75
RIDE HEIGHT / MM	5.2
DOWNSTOP / MM	4.4
UPSTOP / MM	On plastic
ANTI-ROLL BAR Ø / MM	1.1
ARB STIFFENER 1/4	☐ 1/2 ☐ 3/4 ☐ 1 ☐
LOWER ARM EXTENSION / MM	0
STEER. ARM AM23-1	☒
2ND SPRING SPR-P2	☐ P1 ☐
WHEEL SPACER / MM	
DRIVE DIFF	☒
DRIVE POSITION DOWN	☐ UP ☐ +1 ☐
DIFF OIL	8k
DIFF SHIMS	Kit

ST205 ☒

ST05-R ☐

DAMPER D4 ☒

ROTOR 2 HOLES ☒

SPRING STD ☒ S ☐

SRS/RHS ARR. I ☒ II ☐


PSS SETUP 30% ☐ 25% ☐ 15% ☐

DAMPING LINEAR ☒ P1 ☐ P2 ☐

DAMPER SPACER / MM ST237

C45 YES ☒ NO ☐

SHOCKS SETUP

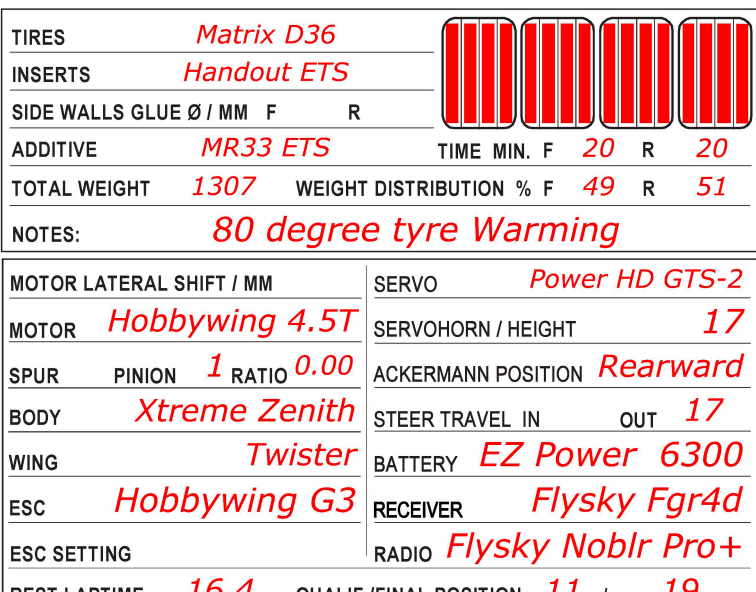

BOTTOM WINDOW LINE TO BODY POST DISTANCE 61 MM

FRONT BODY POST

WINGLET YES ☒ NO ☐

ORING YES ☒ NO ☐

REAR HRB SETTING / MM 5.25

HOLE # 4

SURFACE TO WING MOUNT DISTANCE / MM

COMMENTS: *MXLR front and rear Body Support.*