



NAME **Michele Manzo**
 RACE **Swiss Nationals Rd2**
 TRACK **Dintikon**
 COUNTRY **CH** CLASS **Mod**

DATE **16-17.05.26** TEMP. °C AIR / TRACK **25 /**
 TRACK SURFACE ASPHALT CARPET
 TRACK LAYOUT TECHNICAL MIXED FAST
 TRACTION LOW MEDIUM HIGH

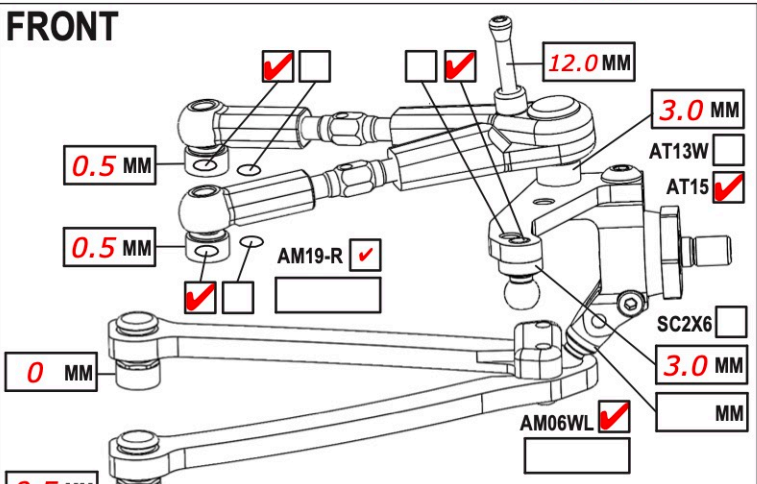



CAMBER ANGLE / °	1.5
CASTER ANGLE / °	4.5
TOE ANGLE / °	1.5
RIDE HEIGHT / MM	4.8
DOWNSTOP / MM	6.0
UPSTOP / MM	33.4
ANTI-ROLL BAR Ø / MM	1.1
ARB STIFFENER 1/4 <input type="checkbox"/> 1/2 <input type="checkbox"/> 3/4 <input type="checkbox"/> 1 <input type="checkbox"/>	
LOWER ARM EXTENSION / MM	0
STEER. ARM AM14LS <input checked="" type="checkbox"/>	
2ND SPRING SPR-P2 <input type="checkbox"/> P1 <input type="checkbox"/>	
WHEEL SPACER / MM	0
DRIVE SPOOL <input checked="" type="checkbox"/> DIFF <input type="checkbox"/>	
DRIVE POSITION DOWN <input checked="" type="checkbox"/> UP <input type="checkbox"/> +1 <input type="checkbox"/>	
DIFF OIL	DIFF SHIMS

1.6 MM	GF/MM 81.4
OIL 250 Hudy	
ST205 <input checked="" type="checkbox"/>	100 %
ST05-R <input type="checkbox"/>	
SHOCKS SETUP	
DAMPER D4 <input checked="" type="checkbox"/>	
ROTOR 2 HOLES <input checked="" type="checkbox"/>	
SPRING STD <input checked="" type="checkbox"/> S <input type="checkbox"/>	
SRS/RHS ARR. I <input checked="" type="checkbox"/> II <input type="checkbox"/>	
PSS SETUP 30% <input checked="" type="checkbox"/> 25% <input type="checkbox"/> 15% <input type="checkbox"/>	
DAMPING LINEAR <input type="checkbox"/> P1 <input type="checkbox"/> P2 <input checked="" type="checkbox"/>	
DAMPER SPACER / MM	ST237
C45 YES <input type="checkbox"/> NO <input checked="" type="checkbox"/>	

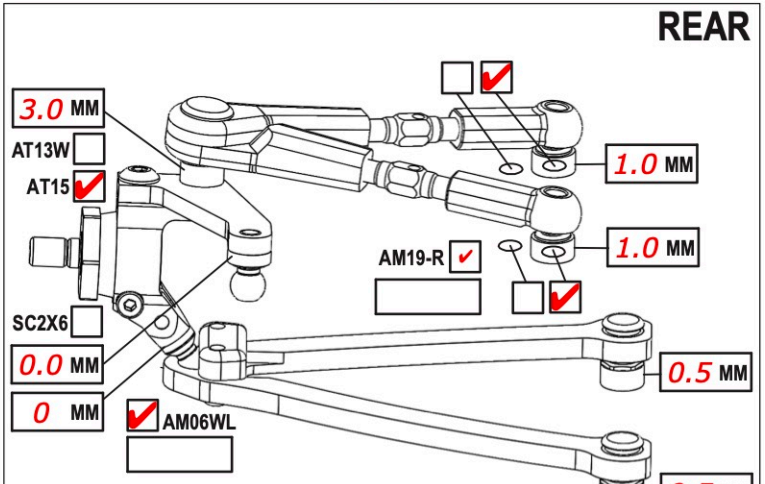

CAMBER ANGLE / °	1.5
CASTER ANGLE / °	-3.0
TOE ANGLE / °	2.8
RIDE HEIGHT / MM	5.0
DOWNSTOP / MM	4.6
UPSTOP / MM	22.8
ANTI-ROLL BAR Ø / MM	1.1
ARB STIFFENER 1/4 <input type="checkbox"/> 1/2 <input type="checkbox"/> 3/4 <input type="checkbox"/> 1 <input type="checkbox"/>	
LOWER ARM EXTENSION / MM	-1
STEER. ARM AM23-1 <input checked="" type="checkbox"/>	
2ND SPRING SPR-P2 <input type="checkbox"/> P1 <input type="checkbox"/>	
WHEEL SPACER / MM	0
DRIVE SPOOL <input type="checkbox"/> DIFF <input checked="" type="checkbox"/>	
DRIVE POSITION DOWN <input checked="" type="checkbox"/> UP <input type="checkbox"/> +1 <input type="checkbox"/>	
DIFF OIL	DIFF SHIMS Small

2.6 MM	GF/MM 121.3
OIL 300 Hudy	
ST205 <input checked="" type="checkbox"/>	85 %
ST05-R <input type="checkbox"/>	
SHOCKS SETUP	
DAMPER D4 <input checked="" type="checkbox"/>	
ROTOR 2 HOLES <input checked="" type="checkbox"/>	
SPRING STD <input checked="" type="checkbox"/> S <input type="checkbox"/>	
SRS/RHS ARR. I <input checked="" type="checkbox"/> II <input type="checkbox"/>	
PSS SETUP 30% <input type="checkbox"/> 25% <input type="checkbox"/> 15% <input type="checkbox"/>	
DAMPING LINEAR <input type="checkbox"/> P1 <input type="checkbox"/> P2 <input checked="" type="checkbox"/>	
DAMPER SPACER / MM	ST237
C45 YES <input checked="" type="checkbox"/> NO <input type="checkbox"/>	

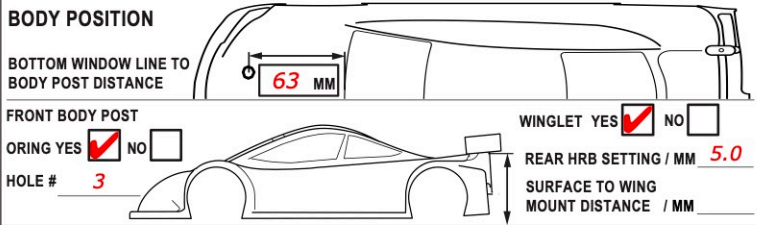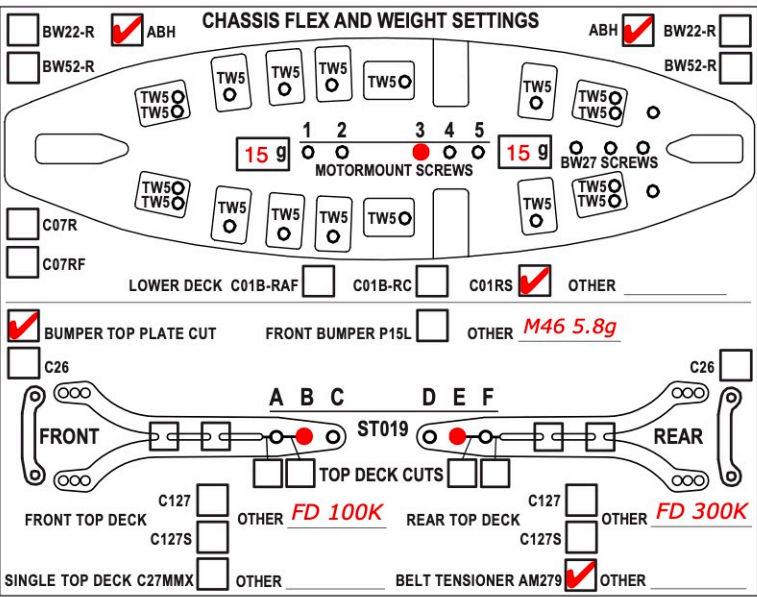

TIRES **Sweep D36**

INSERTS

SIDE WALLS GLUE Ø / MM F - R -

ADDITIVE **Sweep X5** TIME MIN. F 20 R 20

TOTAL WEIGHT **1303** WEIGHT DISTRIBUTION % F 49 R 51

NOTES:

MOTOR LATERAL SHIFT / MM **0** SERVO **MKS HBL575SL**

MOTOR **HW G3 4.5t(32.5°endebell)** SERVOHORN / HEIGHT **17mm**

SPUR **112** PINION **29** RATIO **7.34** ACKERMANN POSITION **rearward**

BODY **Jackal 0.4** STEER TRAVEL IN **25** OUT **16**

WING **Wolverine** BATTERY **Team EAM ULCG 4200**

ESC **HW XR10 Pro G3** RECEIVER **RX 492**

ESC SETTING RADIO **Sanwa M17**

BEST LAPTIME **13.8** QUALIF./FINAL POSITION **1 / 1**

COMMENTS:

BS1-Ti - ST03Ti
Inner ARS link 1mm shimed
Modded/Flex P01X/P02