



TRACK SURFACE		ASPHALT	☒	CARPET	☐	
TRACK LAYOUT	TECHNICAL	☐	MIXED	☒	FAST	☐
TRACTION	LOW	☐	MEDIUM	☒	HIGH	☐

REAR

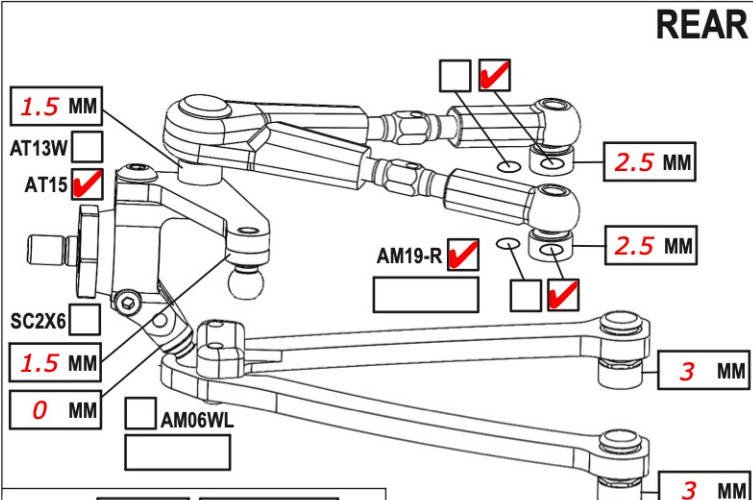

CAMBER ANGLE / °	1
CASTER ANGLE / °	4
TOE ANGLE / °	3
RIDE HEIGHT / MM	5.2
DOWNSTOP / MM	5.4
ANTI-ROLL BAR Ø / MM	1.1
ARB STIFFENER 1/4 ☐ 1/2 ☐ 3/4 ☐ 1 ☐	
LOWER ARM EXTENSION / MM	0
STEER. ARM AM23-1 ☒	
2ND SPRING SPR-P2 ☐ P1 ☐	
WHEEL SPACER / MM	
DRIVE DIFF ☒	
DRIVE POSITION DOWN ☐ UP ☒ +1 ☐	
DIFF OIL 8k DIFF SHIMS kit	

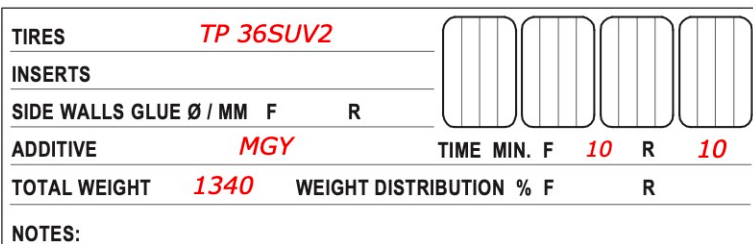

MOTOR LATERAL SHIFT / MM	SERVO	MKS HBL575
MOTOR	SERVOHORN / HEIGHT	MXLR 17mm
SPUR ¹¹⁰ PINION ²⁷ RATIO ^{7.74}	STEER TRAVEL IN ²⁷ OUT	
BODY	BATTERY	EAM 5000
WING	RECEIVER	RX493
ESC	RADIO	M17S
ESC SETTING		
BEST LAPTIME	QUALIF./FINAL POSITION	/

Ti Screws + Turnbuckles, P64S
Bellcrank forward
R, not RR but following Hanulec's directive

HOLE

WINGLET YES ☐ NO ☒

REAR HRB SETTING / MM

SURFACE TO WING

MOUNT DISTANCE / MM