



NAME **Craig Xavier**
 COUNTRY **Fresno, CA USA**
 RACE **2025 ROAR Onroad Paved Nationals 17.5**
 TRACK **CenCal**

DATE **October 26, 2025** TEMP. °C AIR / TRACK **72F** /
 TRACK SURFACE ASPHALT ☒ CARPET ☐
 TRACK LAYOUT TECHNICAL ☐ MIXED ☒ FAST ☐
 TRACTION LOW ☒ MEDIUM ☒ HIGH ☐

FRONT

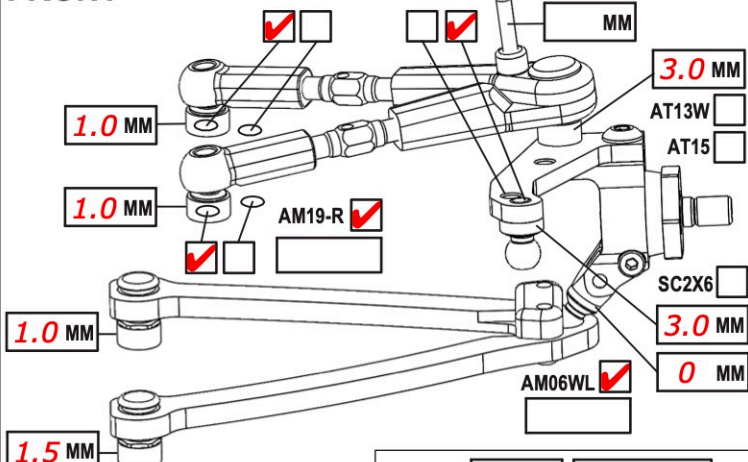


CAMBER ANGLE / ° **2.0**
 CASTER ANGLE / ° **5.0**
 TOE ANGLE / ° **1.0**
 RIDE HEIGHT / MM **4.8**
 DOWNSTOP / MM **5.6**
 ANTI-ROLL BAR Ø / MM **1.1**
 ARB STIFFENER 1/4 ☐ 1/2 ☐ 3/4 ☐ 1 ☐
 LOWER ARM EXTENSION / MM **0**
 STEER. ARM AM14LS ☒
 2ND SPRING SPR-P2 ☐ P1 ☐
 WHEEL SPACER / MM
 DRIVE SPOOL ☒ DIFF ☐
 DRIVE POSITION DOWN ☐ UP ☒ +1 ☐
 DIFF OIL DIFF SHIMS



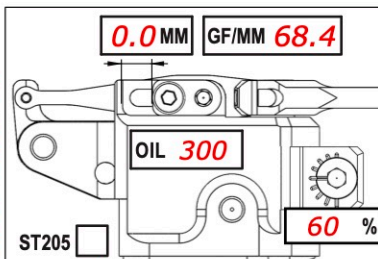


ST205 ☐ ST05-R ☒
SHOCKS SETUP
 DAMPER D4 ☒ PSSX
 ROTOR 2 HOLES ☒
 SPRING STD ☒ S ☐
 SRS/RHS ARR. I ☒ II ☐
 PSS SETUP 30% ☒ 25% ☐ 15% ☐
 DAMPING LINEAR ☐ P1 ☐ P2 ☒
 DAMPER SPACER / MM **1mm**
 C45 YES ☐ NO ☒

REAR

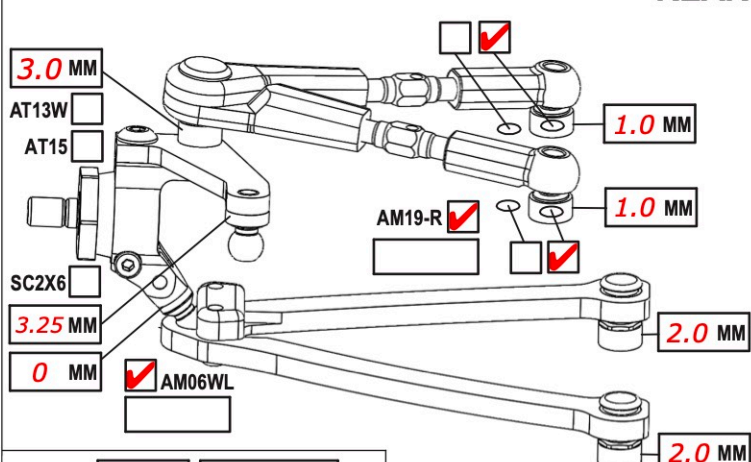

CAMBER ANGLE / ° **2.0**
 CASTER ANGLE / ° **4.0**
 TOE ANGLE / ° **3.0**
 RIDE HEIGHT / MM **5.0**
 DOWNSTOP / MM **5.0**
 ANTI-ROLL BAR Ø / MM **1.2**
 ARB STIFFENER 1/4 ☐ 1/2 ☐ 3/4 ☐ 1 ☐
 LOWER ARM EXTENSION / MM **0**
 STEER. ARM AM23-1 ☒
 2ND SPRING SPR-P2 ☐ P1 ☐
 WHEEL SPACER / MM **0**
 DRIVE DIFF ☒
 DRIVE POSITION DOWN ☐ UP ☒ +1 ☐
 DIFF OIL **7k** DIFF SHIMS **Small**

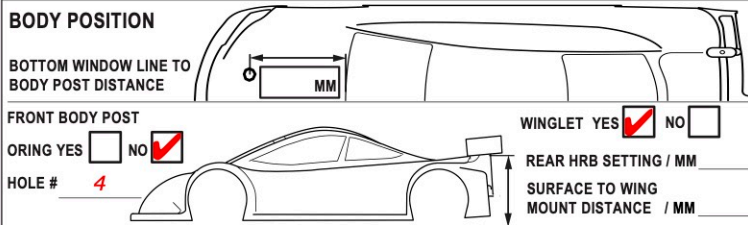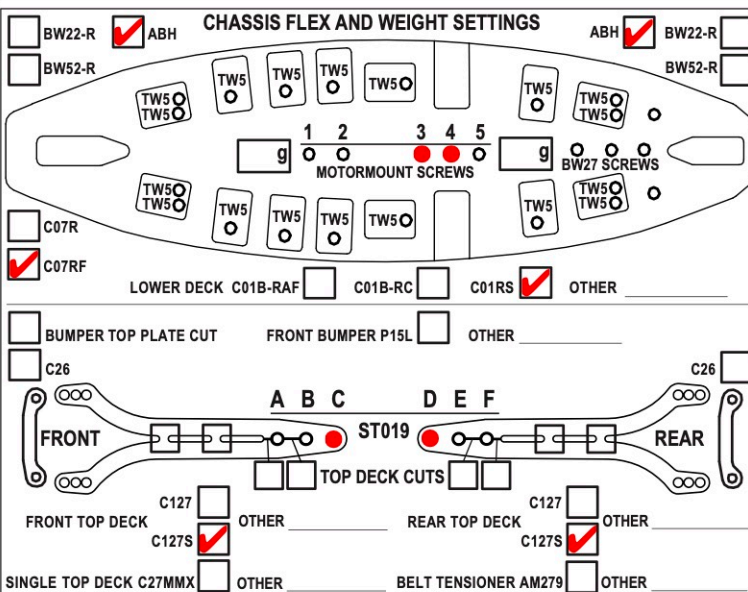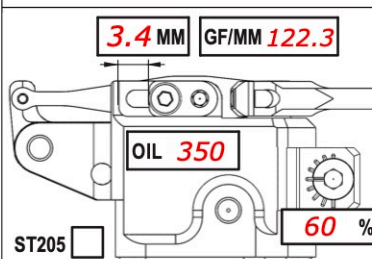

TIRES **Team Powers 36SUV2**
 INSERTS
 SIDE WALLS GLUE Ø / MM F R
 ADDITIVE **Mighty Gripper Yellow** TIME MIN. F **10** R **10**
 TOTAL WEIGHT **1330** WEIGHT DISTRIBUTION % F **49.5** R **50.5**
 NOTES:

MOTOR LATERAL SHIFT / MM **0**
 MOTOR **R1 V21SS 17.5 w/Red Dot rotor**
 SPUR **88** PINION **48** RATIO **3.48**
 BODY **Xtreme Twister Speciale**
 WING **Twister OG**
 ESC **R1 Wurks**
 ESC SETTING
 BEST LAPTIME
 SERVO **Sanwa**
 SERVOHORN / HEIGHT **18mm**
 ACKERMANN POSITION **Back**
 STEER TRAVEL IN **25** OUT
 BATTERY **R1 7000**
 RECEIVER **Sanwa**
 RADIO **Sanwa M17**
 QUALIF./FINAL POSITION **2 / 7**

COMMENTS:
 MXLR M-Flex bumper, 1Up Racing Ceramic Bearings, 1Up Racing titanium screws and turnbuckles, R1 Wurks titanium spool and diff outdrives. Awesomatix titanium ballstuds, low friction belts and pulleys, 1.6mm Top Decks, FSS
 MR33 oil, WTF 35mm MILF with Stay Hard booster, RC Maker Rear Body Mount. Upstops Front - 20.6 Rear - 21.0
 7g in front of servo, 14g under rx, 15g behind motor