



DATE	2-4.01.26		TEMP. °C	AIR / TRACK	/
TRACK SURFACE			ASPHALT	☐	CARPET ☒
TRACK LAYOUT	TECHNICAL	☐	MIXED	☒	FAST ☐
TRACTION	LOW	☐	MEDIUM	☒	HIGH ☐

REAR

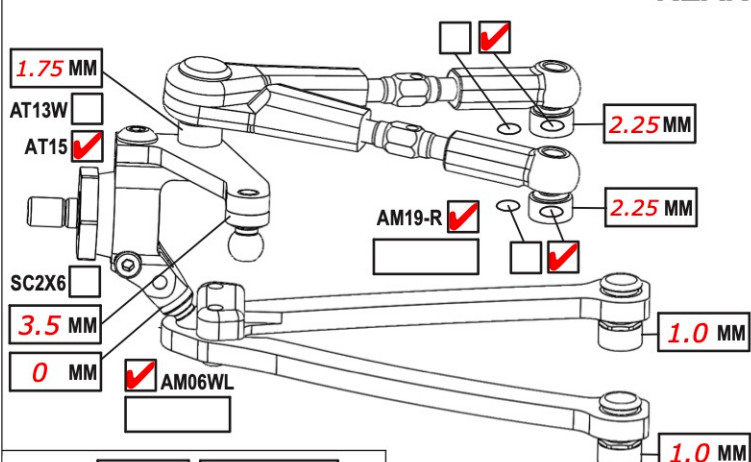

CAMBER ANGLE / °	1.75
CASTER ANGLE / °	2.5
TOE ANGLE / °	2.75
RIDE HEIGHT / MM	5.2
DOWNSTOP / MM	4.6
ANTI-ROLL BAR Ø / MM	1.1
ARB STIFFENER 1/4 ☐ 1/2 ☐ 3/4 ☐ 1 ☐	
LOWER ARM EXTENSION / MM	0
STEER. ARM AM23-1 ☒	
2ND SPRING SPR-P2 ☐ P1 ☐	
WHEEL SPACER / MM	0
DRIVE DIFF ☒	
DRIVE POSITION DOWN ☒ UP ☐ +1 ☐	
DIFF OIL 10K DIFF SHIMS SHS5X7X0.4	

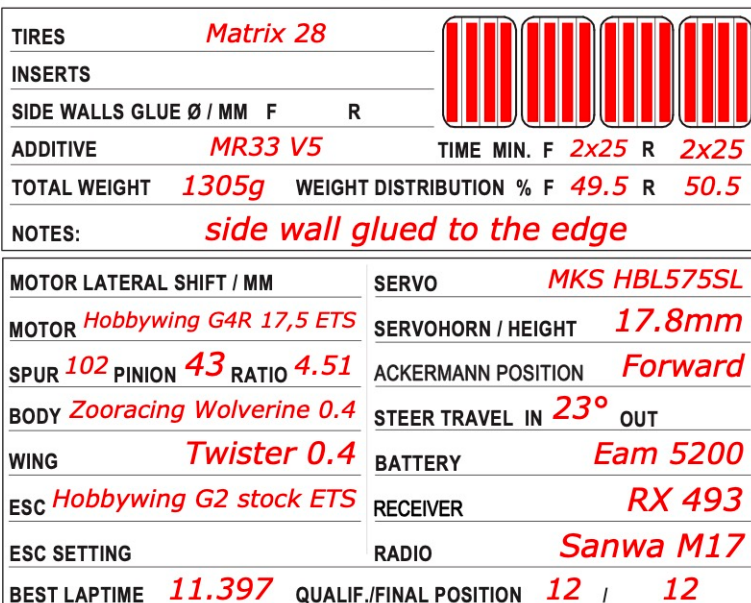

BOTTOM WINDOW LINE TO BODY POST DISTANCE 58 MM

FRONT BODY POST ORING YES ☒ NO ☐

HOLE # 3

WINGLET YES ☒ NO ☐

REAR HRB SETTING / MM 1.75

SURFACE TO WING MOUNT DISTANCE / MM

COMMENTS:
15 g at servo, 5g next to the fan