



DATE	09.08.2026		TEMP. °C	AIR / TRACK	/
TRACK SURFACE			ASPHALT	☒	CARPET ☐
TRACK LAYOUT	TECHNICAL	☐	MIXED	☒	FAST ☒
TRACTION	LOW	☐	MEDIUM	☐	HIGH ☒

REAR

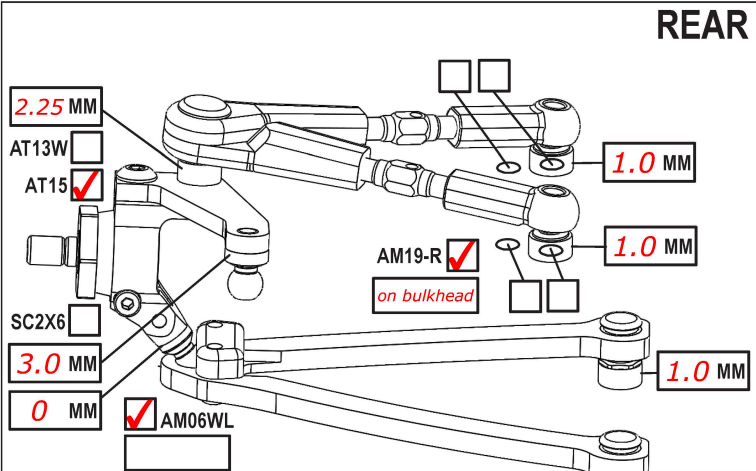

		CAMBER ANGLE / ° 1.8	
		CASTER ANGLE / ° 3.0	
		TOE ANGLE / ° 2.5	
		RIDE HEIGHT / MM 5.2	
		DOWNSTOP / MM 4.8	
ST205 ☒ ST05-R ☐		UPSTOP / MM On Plastic	
SHOCKS SETUP		ANTI-ROLL BAR Ø / MM 1.1	
DAMPER D4 ☒		ARB STIFFENER 1/4 ☐ 1/2 ☐ 3/4 ☐ 1 ☐	
ROTOR 2 HOLES ☒		LOWER ARM EXTENSION / MM 0	
SPRING STD ☒ S ☐		STEER. ARM AM23-1 ☒	
SRS/RHS ARR. I ☒ II ☐		2ND SPRING SPR-P2 ☐ P1 ☐	
PSS SETUP 30% ☐ 25% ☐ 15% ☐		WHEEL SPACER / MM 0	
DAMPING LINEAR ☐ P1 ☐ P2 ☒		DRIVE DIFF ☒	
DAMPER SPACER / MM ST237		DRIVE POSITION DOWN ☒ UP ☐ +1 ☐	
C45 YES ☒ NO ☐		DIFF OIL 10K / DIFF SHIMS SH5X7X0.4	

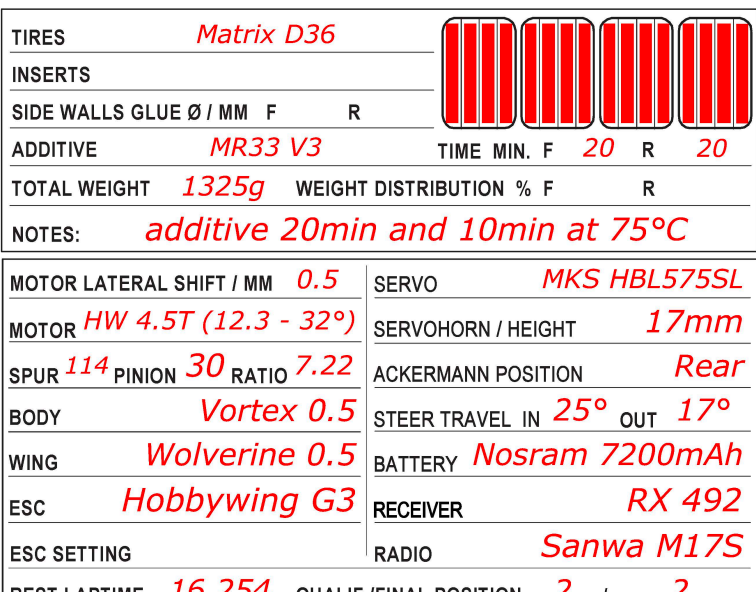

58 MM

WINGLET YES ☒ NO ☐

REAR HRB SETTING / MM 5.25

SURFACE TO WING MOUNT DISTANCE / MM

COMMENTS:

SB3x5AL / C07R / AT15 / AT144 / BW7 / BW8