


This form has been optimized for use with Adobe Acrobat.
Use of alternative PDF readers may result in formatting, display, or data entry issues.


NAME	Max Mächler		
RACE	EFRA EC		
TRACK	LMCC Luxembourg		
COUNTRY	Luxembourg	CLASS	13.5T

DATE		7-9.08.2026		TEMP. °C AIR / TRACK		20-32 /	
TRACK SURFACE				ASPHALT		☒	
				CARPET		☐	
TRACK LAYOUT		TECHNICAL		MIXED		☒	
				FAST		☐	
TRACTION		LOW		MEDIUM		☒	
				HIGH		☐	

FRONT

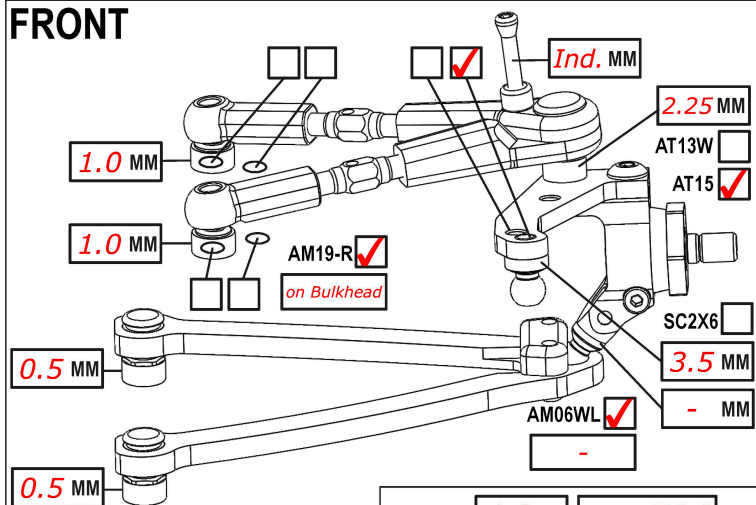


CAMBER ANGLE /°	1.0
CASTER ANGLE /°	4.0
TOE ANGLE /°	1.0
RIDE HEIGHT / MM	4.8
DOWNSTOP / MM	5.6
UPSTOP / MM	on plastic
ANTI-ROLL BAR Ø / MM	1.1
ARB STIFFENER	1/4 ☐ 1/2 ☐ 3/4 ☐ 1 ☐
LOWER ARM EXTENSION / MM	0
STEER. ARM AM14LS	☒
2ND SPRING SPR-P2	☐ P1 ☐
WHEEL SPACER / MM	-
DRIVE	SPOOL ☒ DIFF ☐
DRIVE POS.	DOWN ☐ UP ☒ +1 ☐
DIFF OIL	DIFF SHIMS

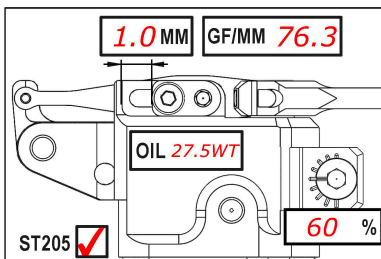


ST05-R ☐		SHOCKS SETUP	
DAMPER	D4 ☒		
ROTOR	2 HOLES ☒		
SPRING	STD ☒	S	☐
SRS/RHS ARR.	I ☒	II	☐
PSS SETUP	30% ☒	25% ☐	15% ☐
DAMPING LINEAR	☐	P1 ☐	P2 ☒
DAMPER SPACER / MM		SH0.5	
C45	YES ☐	NO	☒

REAR

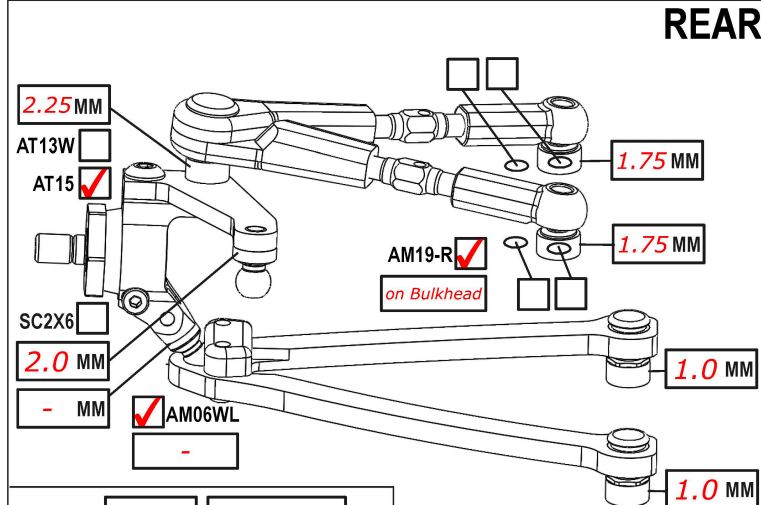

2.8 MM

GF/MM 114.6



OIL 30WT


60 %

SHOCKS SETUP


DAMPER	D4	☒	
ROTOR 2 HOLES		☒	
SPRING	STD	☒	S ☐
SRS/RHS ARR.	I	☒	II ☐
PSS SETUP	30%	☐	25% ☐ 15% ☐
DAMPING LINEAR		☒	P1 ☐ P2 ☐
DAMPER SPACER / MM			SH0.5
C45	YES	☒	NO ☐

CAMBER ANGLE /°	1.25
CASTER ANGLE /°	-2.0
TOE ANGLE /°	3.0
RIDE HEIGHT / MM	5.2
DOWNSTOP / MM	4.6
UPSTOP / MM	on plastic
ANTI-ROLL BAR Ø / MM	1.0
ARB STIFFENER	☐ 1/4 ☐ 1/2 ☐ 3/4 ☐ 1
LOWER ARM EXTENSION / MM	0
STEER. ARM AM23-1	☒
2ND SPRING SPR-P2	☐ P1 ☐
WHEEL SPACER / MM	-
DRIVE DIFF	☒ GD2B-R
DRIVE POS.	DOWN ☐ UP ☒ +1 ☐
DIFF OIL	10K
DIFF SHIMS	SH5X7X0.4

CHASSIS FLEX AND WEIGHT SETTINGS

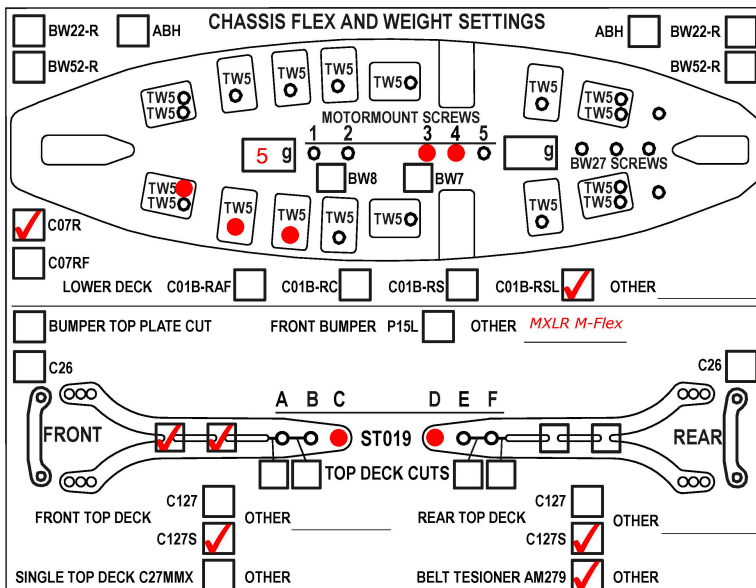

BODY POSITION	
1	1
2	2
3	3
4	4
5	5
6	6
7	7
8	8
9	9
10	10
11	11
12	12
13	13
14	14
15	15
16	16
17	17
18	18
19	19
20	20
21	21
22	22
23	23
24	24
25	25
26	26
27	27
28	28
29	29
30	30
31	31
32	32
33	33
34	34
35	35
36	36
37	37
38	38
39	39
40	40
41	41
42	42
43	43
44	44
45	45
46	46
47	47
48	48
49	49
50	50
51	51
52	52
53	53
54	54
55	55
56	56
57	57
58	58
59	59
60	60
61	61
62	62
63	63
64	64
65	65
66	66
67	67
68	68
69	69
70	70
71	71
72	72
73	73
74	74
75	75
76	76
77	77
78	78
79	79
80	80
81	81
82	82
83	83
84	84
85	85
86	86
87	87
88	88
89	89
90	90
91	91
92	92
93	93
94	94
95	95
96	96
97	97
98	98
99	99
100	100

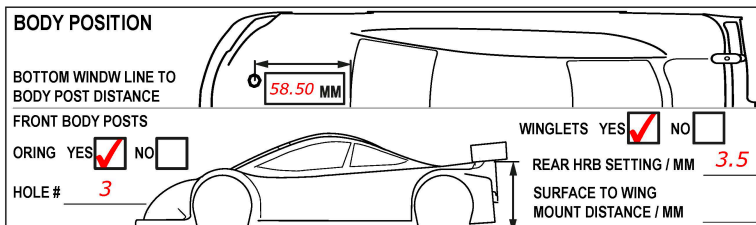

TIRES	<i>Hudy A2 36R</i>			
INSERTS				
SIDEWALLS GLUE Ø / MM	F	-	R	-
ADDITIVE	<i>MR33 V3</i>		TIME MIN. F	<i>15-20</i>
			R	<i>15-20</i>
TOTAL WEIGHT	<i>1321</i>	WEIGHT DISTRIBUTION %	F	R
NOTES:	<i>1time 80°heating</i>			

MOTOR LATERAL SHIFT / MM	1.75	SERVO	MKS HBL575 SL				
MOTOR	Hobbywing G5 13.5T	SERVO HORN / HEIGHT	MXLR / 17mm				
SPUR	96	PINION	45	RATIO	4.05	ACKERMANN POSITION	Backwards
BODY	ZooRacing Wolverine MAX 0.4	STEER. TRAVEL	IN	22	OUT		
WING	Twister	BATTERY	Team EAM 9200				
ESC	Hobbywing XR10 Pro G3X	RECEIVER	Sanwa RX493i				
ESC SETTINGS	Blinky	RADIO	Sanwa M17S				
BEST LAPTIME		QUALIF./FINAL POSITION	1	/	1		

COMMENTS:

MXLR M-FlexBumper / MXLR Alloy Servo Arm / MXLR Front Body Support /
MXLR Rear Body Support / MXLR FAN BOOSTER

OR14V / SB3X5AL / C07R / AT144 / AM279 / FSS / AT21-Ti / BS1-Ti

15g. MXLR Tungsten under receiver / 15g MXLR Tungsten in front of Servo.

AXON Oil in Diff & Dampers.