



NAME **Louis Kretschmer**
 COUNTRY **Netherlands**
 RACE **ETS Apeldoorn**
 TRACK **AMCA Apeldoorn**

DATE **28.05.-31.05.2026** TEMP. °C AIR / TRACK **20-30° /**
 TRACK SURFACE ASPHALT CARPET
 TRACK LAYOUT TECHNICAL MIXED FAST
 TRACTION LOW MEDIUM HIGH

FRONT

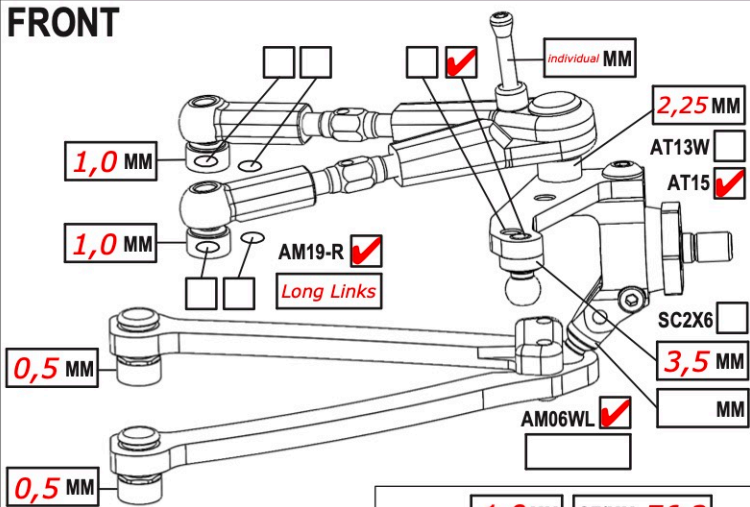


CAMBER ANGLE / ° **1,0**
 CASTER ANGLE / ° **4,0**
 TOE ANGLE / ° **1,0**
 RIDE HEIGHT / MM **4,8**
 DOWNSTOP / MM **5,8**
 ANTI-ROLL BAR Ø / MM **1,1**
 ARB STIFFENER 1/4 1/2 3/4 1
 LOWER ARM EXTENSION / MM **0**
 STEER. ARM AM14LS
 2ND SPRING SPR-P2 P1
 WHEEL SPACER / MM
 DRIVE SPOOL DIFF
 DRIVE POSITION DOWN UP +1
 DIFF OIL DIFF SHIMS




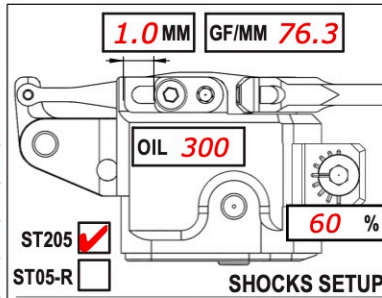


SHOCKS SETUP
 ST205 ST05-R
 DAMPER D4
 ROTOR 2 HOLES
 SPRING STD S
 SRS/RHS ARR. I II
 PSS SETUP 30% 25% 15%
 DAMPING LINEAR P1 P2
 DAMPER SPACER / MM **1,0mm**
 C45 YES NO

REAR

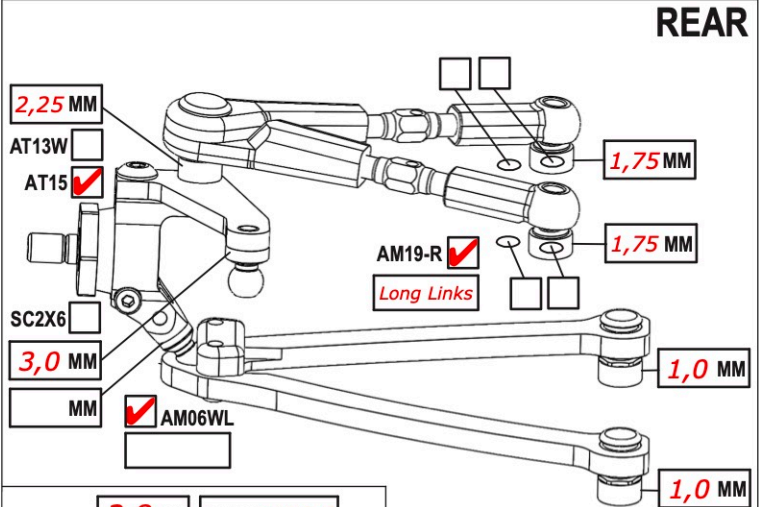

CAMBER ANGLE / ° **1,0**
 CASTER ANGLE / ° **-3**
 TOE ANGLE / ° **2,25**
 RIDE HEIGHT / MM **5,2**
 DOWNSTOP / MM **4,6**
 ANTI-ROLL BAR Ø / MM **1,1**
 ARB STIFFENER 1/4 1/2 3/4 1
 LOWER ARM EXTENSION / MM **0**
 STEER. ARM AM23-1
 2ND SPRING SPR-P2 P1
 WHEEL SPACER / MM
 DRIVE DIFF
 DRIVE POSITION DOWN UP +1
 DIFF OIL **8k** DIFF SHIMS *Small Shims*

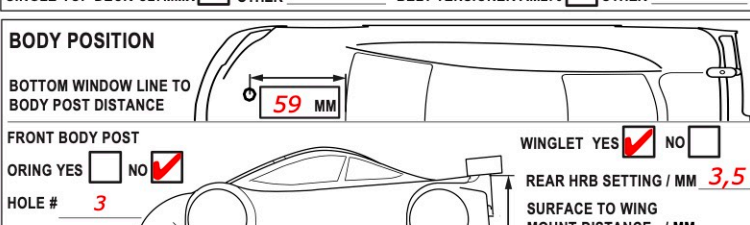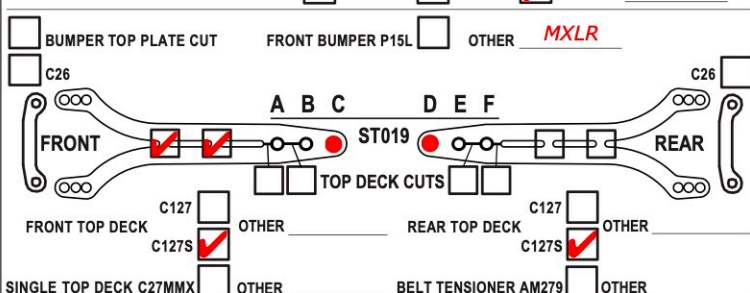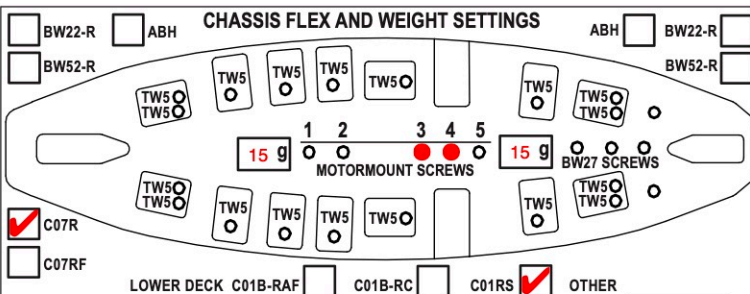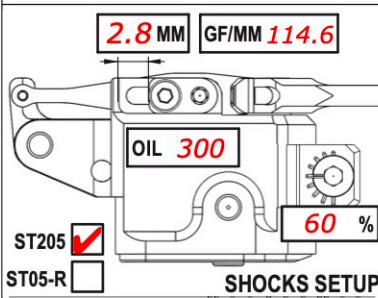

TIRES **Matrix EPA Z036**
 INSERTS
 SIDE WALLS GLUE Ø / MM F R
 ADDITIVE **MR33 V3 Outdoor** TIME MIN. F **20** R **20**
 TOTAL WEIGHT **1320** WEIGHT DISTRIBUTION % F R
 NOTES: **70°, 2x saucing**

MOTOR LATERAL SHIFT / MM **1,0** SERVO **MKS HBL 575SL**
 MOTOR **Hobbywing ETS** SERVOHORN / HEIGHT **17,5**
 SPUR **90** PINION **45** RATIO **3.80** ACKERMANN POSITION **rearward**
 BODY **Wolverine (0.4mm)** STEER TRAVEL IN **22** OUT
 WING **Wolverine (0.4mm)** BATTERY **EAM 6400mAh**
 ESC **Hobbywing ETS** RECEIVER **Sanwa RX481**
 ESC SETTING **Individual** RADIO **Sanwa M17**
 BEST LAP TIME **15,6** QUALIF./FINAL POSITION **4 / 4**

COMMENTS:
 - Top Links mounted on the Bulkheads for long link
 - Option Parts: SB3x5AL on top of the car, OR14V, BC1, BW7, BW8
 - Servo Horn Shim 4mm, 20g on Servo Back, 10g on Servo Front
 - MXLR Parts: 05-001, 05-003, 09-002, 09-005