

AWESOME 1/18 A800FXR

SETUP SHEET

NAME **Roman Borschel**

RACE **EC**

TRACK **LMCC Luxembourg**

COUNTRY **Luxembourg**

CLASS **21.5T**

DATE **07-09..08.2026**

TEMP. °C AIR / TRACK **29 / 50-55**

TRACK SURFACE

ASPHALT ☒

CARPET ☐

TRACK LAYOUT

TECHNICAL ☐

MIXED ☒

FAST ☐


TRACTION

LOW ☐


MEDIUM ☒

HIGH ☐

FRONT

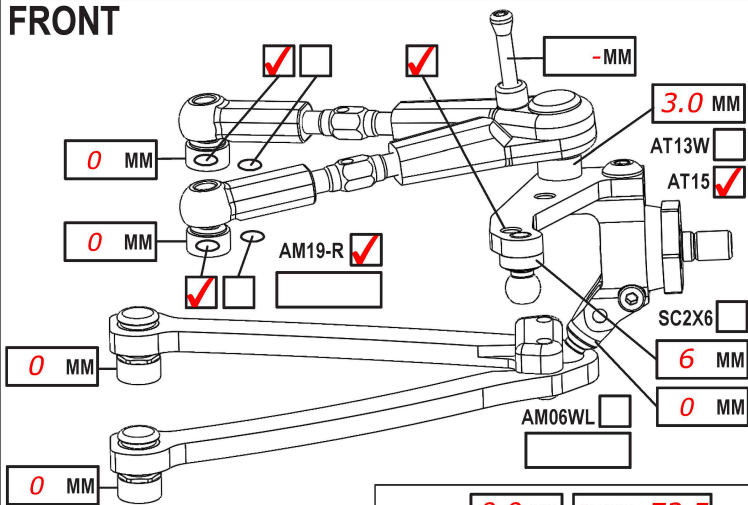


CAMBER ANGLE / ° **2.0**
 CASTER ANGLE / ° **6.0**
 TOE ANGLE / ° **1**
 RIDE HEIGHT / MM **4.8**
 DOWNSTOP / MM **5.0**
 UPSTOP / MM **-**
 ANTI-ROLL BAR Ø / MM **1.0**
 ARB STIFFENER 1/4 ☐ 1/2 ☐ 3/4 ☐ 1 ☐
 LOWER ARM EXTENSION **-1MM**
 STEER. ARM AM14FX ☐ **AM14FX-LA**
 WHEEL SPACER / MM **-**
 DRIVE SPOOL ☐ DIFF ☒
 DRIVE POSITION UP ☒ DOWN ☐
 DIFF OIL **100k** DIFF SHIMS **WA03**

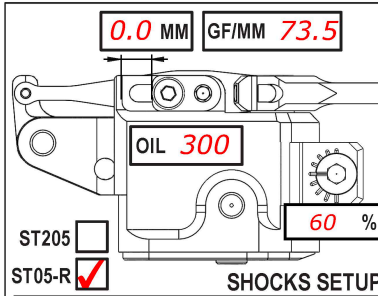


ST205 ☐ ST05-R ☒
 DAMPER D4 ☒
 ROTOR 2 HOLES ☒
 SPRING STD ☒ S ☐
 SRS/RHS ARR. I ☒ II ☐
 PSS SETUP 30% ☒ 25% ☐ 15% ☐
 DAMPING LINEAR ☐ P1 ☐ P2 ☒
 DAMPER SPACER / MM


REAR

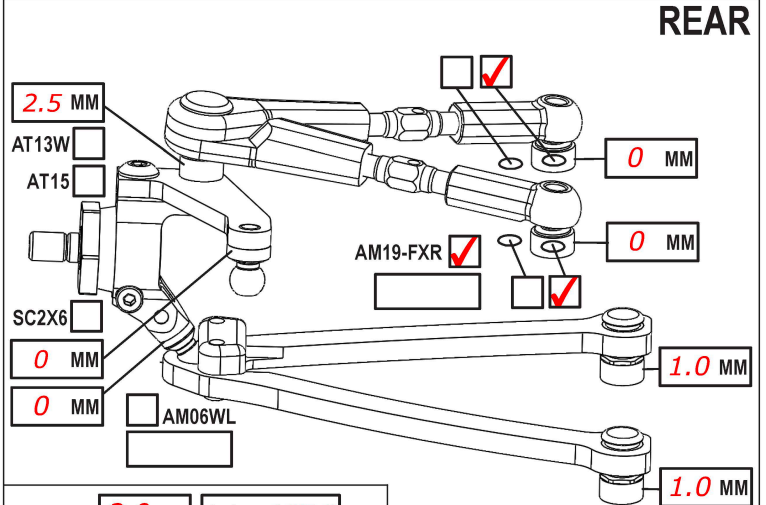



CAMBER ANGLE / ° **2.0**
 CASTER ANGLE / ° **-4.0**
 TOE ANGLE / ° **3.25**
 RIDE HEIGHT / MM **5.0**
 DOWNSTOP / MM **5.5**
 UPSTOP / MM **-**
 ANTI-ROLL BAR Ø / MM **1.3**
 ARB STIFFENER 1/4 ☐ 1/2 ☐ 3/4 ☐ 1 ☐
 LOWER ARM EXTENSION **0 MM**
 STEER. ARM AM23-1 ☒
 WHEEL SPACER / MM **-**
 WHEEL BASE #1 ☐ #2 ☐ #3 ☐ #4 ☒
 C45FXR YES ☐ NO ☒

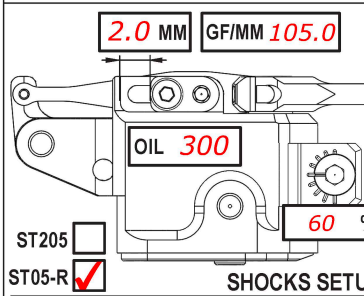

ST205 ☐ ST05-R ☒
 DAMPER D4 ☒
 ROTOR 2 HOLES ☒
 SPRING STD ☒ S ☐
 SRS/RHS ARR. I ☒ II ☐
 PSS SETUP 30% ☐ 25% ☐ 15% ☐
 DAMPING LINEAR ☒ P1 ☐ P2 ☐
 DAMPER SPACER / MM

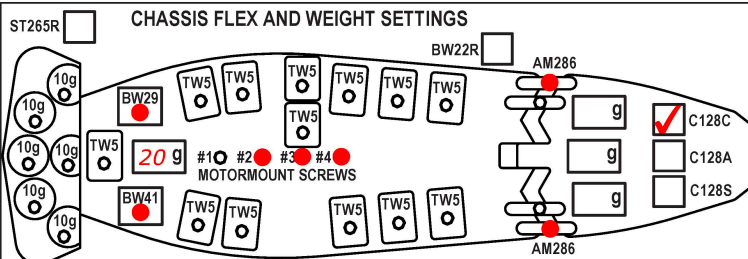

ST265R ☐ BW22R ☐ AM286 ☐
 C128C ☒ C128A ☐ C128S ☐
 AM220FXR ☒ C01FXR-A ☐ C01FXR-C ☒ C01FXR-S ☐
 BUMPER TOP PLATE CUT ☒ BUMPER TOP PLATE P14-5-R ☒ C07R ☐ C07RF ☐
 AM288 ☐ FRONT BUMPER P15FX ☐ P15L ☐ OTHER **MAX-09-004**

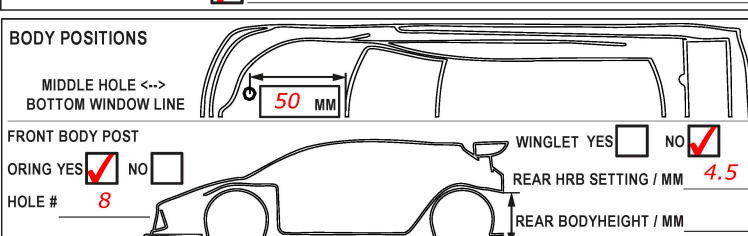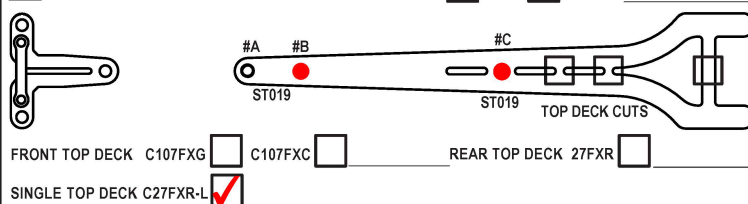

TIRES **RI-36086**
 INSERTS **STD**
 SIDE WALLS GLUE Ø / MM F ☐ R ☐
 ADDITIVE **MR33 V3** TIME MIN. F **15** R **15**
 TOTAL WEIGHT **1270** WEIGHT DISTRIBUTION % F **68** R **32**
 NOTES:

MOTOR LATERAL SHIFT / MM **1.75mm** SERVO **Power HD S15**
 MOTOR **HW30401767 21.5T G5 Torque** SERVOHORN / HEIGHT **19mm**
 SPUR **102** PINION **43** RATIO **4.51** STEER TRAVEL IN **29** OUT **23**
 BODY **Zooracing Apex 0.5** BATTERY **EAM 5600**
 WING **Zooracing Apex 0.5** RECEIVER **Sanwa RX-482**
 ESC **HW30112620 Xerun XR10 Pro G3X** RADIO **Sanwa M17**
 ESC SETTING
 BEST LAPTIME **21,9** QUALIF./FINAL POSITION **3 / 6**

COMMENTS:
Option Parts: NOS Bottle, A800-ZA Pos. #3, BEL225LF, BS1-Ti, ABH, AT144, C204-S-1 (Front), Max 09-004,