


NAME **Max Mächler**
 COUNTRY **Netherlands**
 RACE **EFRA EC**
 TRACK **RACO2000**

DATE **22-24.08.2025**

TEMP. °C AIR / TRACK /

TRACK SURFACE ASPHALT ☒ CARPET ☐
 TRACK LAYOUT TECHNICAL ☐ MIXED ☐ FAST ☒
 TRACTION LOW ☒ MEDIUM ☒ HIGH ☐

FRONT

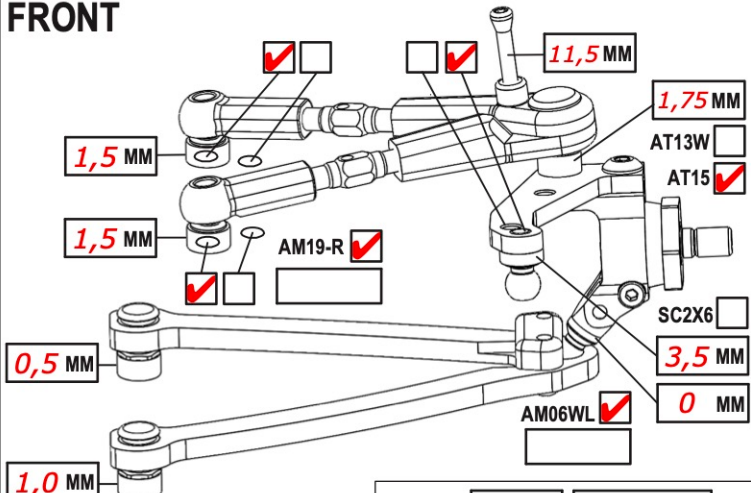

CAMBER ANGLE / ° **2,25**
 CASTER ANGLE / ° **4,0**
 TOE ANGLE / ° **1,0**
 RIDE HEIGHT / MM **4,6**

DOWNSTOP / MM **5,6 / Upstop 32,00mm**

ANTI-ROLL BAR Ø / MM **1,1**

ARB STIFFENER 1/4 ☐ 1/2 ☐ 3/4 ☐ 1 ☐

LOWER ARM EXTENSION / MM **0**

STEER. ARM AM14LS ☒


2ND SPRING SPR-P2 ☐ P1 ☐ -

WHEEL SPACER / MM -

DRIVE SPOOL ☒ DIFF ☐

DRIVE POSITION DOWN ☒ UP ☐ +1 ☐

DIFF OIL DIFF SHIMS

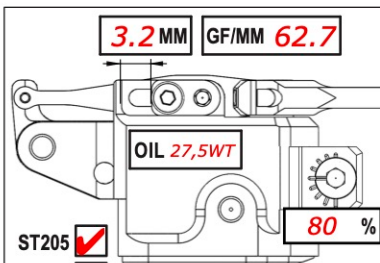

SHOCKS SETUP

DAMPER D4 ☒

ROTOR 2 HOLES ☒

SPRING STD ☒ S ☐

SRS/RHS ARR. I ☐ II ☒


PSS SETUP 30% ☒ 25% ☐ 15% ☐

DAMPING LINEAR ☐ P1 ☐ P2 ☒

DAMPER SPACER / MM -

C45 YES ☐ NO ☐

REAR

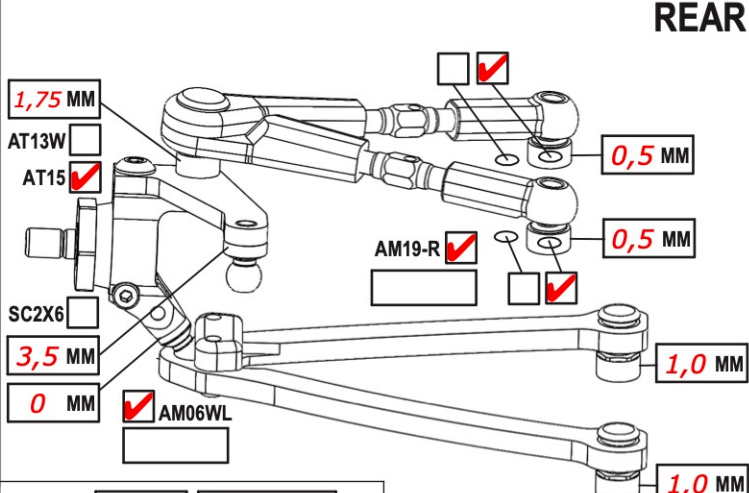

CAMBER ANGLE / ° **1,8**
 CASTER ANGLE / ° **-4 short**
 TOE ANGLE / ° **2,25**
 RIDE HEIGHT / MM **4,8**

DOWNSTOP / MM **4,6 / Upstop 31,50mm**

ANTI-ROLL BAR Ø / MM **1,1**

ARB STIFFENER 1/4 ☐ 1/2 ☐ 3/4 ☐ 1 ☐

LOWER ARM EXTENSION / MM **0**

STEER. ARM AM23-1 ☒


2ND SPRING SPR-P2 ☐ P1 ☐ -

WHEEL SPACER / MM **0**

DRIVE DIFF ☒

DRIVE POSITION DOWN ☒ UP ☐ +1 ☐

DIFF OIL **7,5K** DIFF SHIMS **SH5X7X0.4**

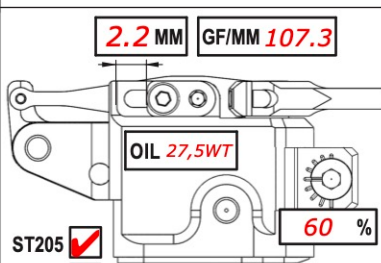

SHOCKS SETUP

DAMPER D4 ☒

ROTOR 2 HOLES ☒

SPRING STD ☒ S ☐




SRS/RHS ARR. I ☒ II ☐

PSS SETUP 30% ☐ 25% ☐ 15% ☐

DAMPING LINEAR ☒ P1 ☐ P2 ☐

DAMPER SPACER / MM -

C45 YES ☒ NO ☐

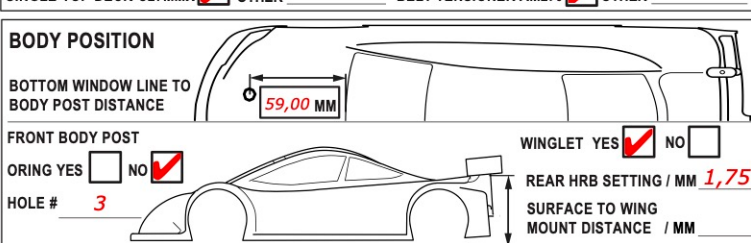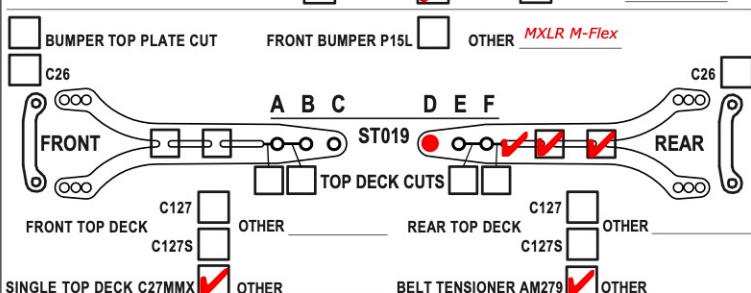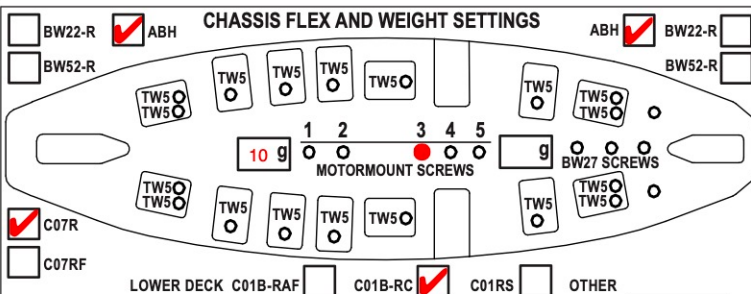

TIRES **RUSH 36**
 INSERTS **std.**
 SIDE WALLS GLUE Ø / MM F - R -
 ADDITIVE **MR33 V3** TIME MIN. F **30** R **30**
 TOTAL WEIGHT **1320** WEIGHT DISTRIBUTION % F **50** R **50**

NOTES:

MOTOR LATERAL SHIFT / MM **1,75** SERVO **MKS HBL575 SL**
 MOTOR **Hobbywing G4R 13,5T** SERVOHORN / HEIGHT **MXLR 17mm**
 SPUR **100** PINION **48** RATIO **3.96** ACKERMANN POSITION **FORWARD**
 BODY **ZooRacing Wolverine 0,4** STEER TRAVEL IN **24** OUT
 WING **Twister 0,5** BATTERY **Team EAM 8400**
 ESC **Hobbywing XR10 Pro G3X** RECEIVER **Sanwa RX-493**
 ESC SETTING **Blinky** RADIO **Sanwa M17S**
 BEST LAPTIME **14,9** QUALIF./FINAL POSITION **2 / 3**

COMMENTS:
 10g MXLR Tungsten on front Servo Case. 15g MXLR Tungsten under receiver.
 1x ST110 in front of Servo. 1x ST105 on receiver.
 MXLR M-FlexBumper / MXLR Alloy Servo Arm / MXLR Front Body Support / MXLR Rear Body Support / OR14V / SB3X5AL / C27MMX / C07R / ABH / AT144
 AXON Oil in Diff & Dampers.