



TRACK SURFACE		ASPHALT	☐	CARPET	☒
TRACK LAYOUT	TECHNICAL		☐	MIXED	☒
TRACTION	LOW		☐	MEDIUM	☒
				HIGH	☐

REAR

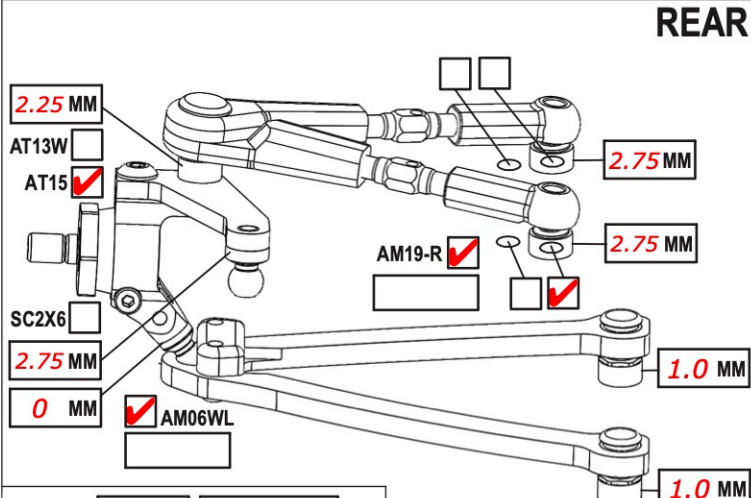

CAMBER ANGLE / °	1.75
CASTER ANGLE / °	2.0
TOE ANGLE / °	2.75
RIDE HEIGHT / MM	5.3
DOWNSTOP / MM	4.6
ANTI-ROLL BAR Ø / MM	1.1
ARB STIFFENER 1/4 ☐ 1/2 ☐ 3/4 ☐ 1 ☐	
LOWER ARM EXTENSION / MM	0
STEER. ARM AM23-1 ☒	
2ND SPRING SPR-P2 ☐ P1 ☐	
WHEEL SPACER / MM	0
DRIVE DIFF ☒	
DRIVE POSITION DOWN ☒ UP ☐ +1 ☐	
DIFF OIL 8.500	DIFF SHIMS SH5X7X0.4

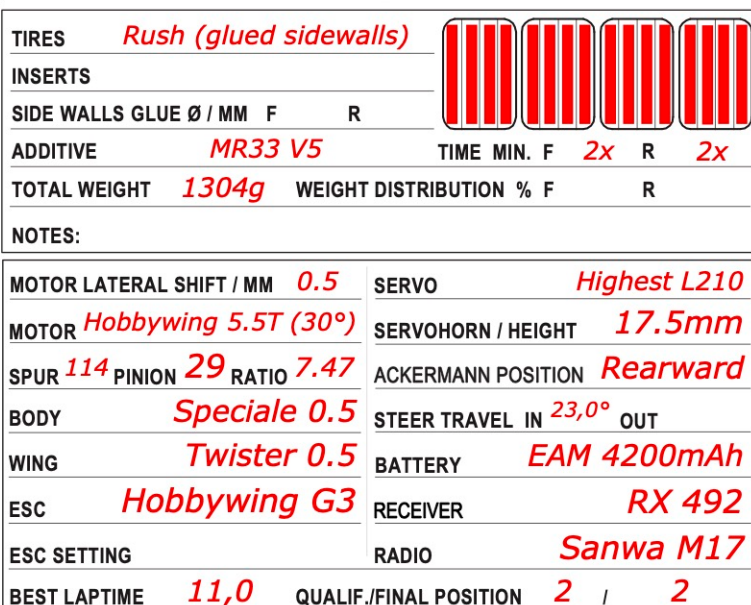

HOLE # **3** SURFACE TO WING
MOUNT DISTANCE / MM

- Upstop setting: Front - 22.5mm // Rear - 23.0mm
- Hudy Oil used
- Option parts: SB3x5AL / C07R / AT15 / AT144 / BW7 / BW8