060726

AWESOMATIX A800RR

This form has been optimized for use with Adobe Acrobat.
Use of alternative PDF readers may result in formatting, display, or data entry issues.

NAME Daniel Hiesch
RACE EFRA EC 26
TRACK LMCC Luxembourg
COUNTRY Luxembourg CLASS 13.5T

DATE 07-09.08.2026 TEMP. °C AIR / TRACK 27 /
TRACK SURFACE ASPHALT ☑ CARPET ☐
TRACK LAYOUT TECHNICAL ☐ MIXED ☑ FAST ☑
TRACTION LOW ☐ MEDIUM ☑ HIGH ☐

FRONT

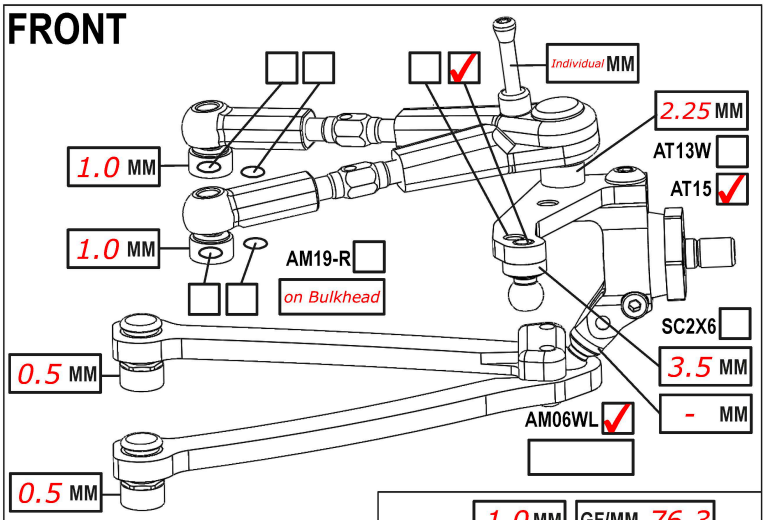

CAMBER ANGLE /° 1.0
CASTER ANGLE /° 4.0
TOE ANGLE /° 1.0
RIDE HEIGHT / MM 4.8
DOWNSTOP / MM 5.6
UPSTOP / MM on plastic
ANTI-ROLL BAR Ø / MM 1.1
ARB STIFFENER 1/4 ☐ 1/2 ☐ 3/4 ☐ 1 ☐
LOWER ARM EXTENSION / MM 0
STEER. ARM AM14LS ☑
2ND SPRING SPR-P2 ☐ P1 ☐
WHEEL SPACER / MM -
DRIVE SPOOL ☑ DIFF ☐
DRIVE POS. DOWN ☐ UP ☑ +1 ☐
DIFF OIL | DIFF SHIMS

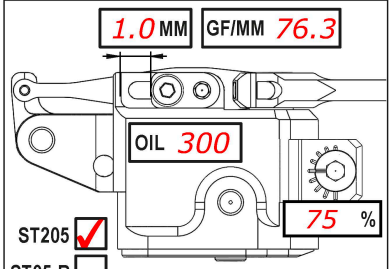

SHOCKS SETUP
DAMPER D4 ☑
ROTOR 2 HOLES ☑
SPRING STD ☑ S ☐
SRS/RHS ARR. I ☑ II ☐
PSS SETUP 30% ☑ 25% ☐ 15% ☐
DAMPING LINEAR ☐ P1 ☐ P2 ☑
DAMPER SPACER / MM SH0.5
C45 YES ☐ NO ☑

REAR

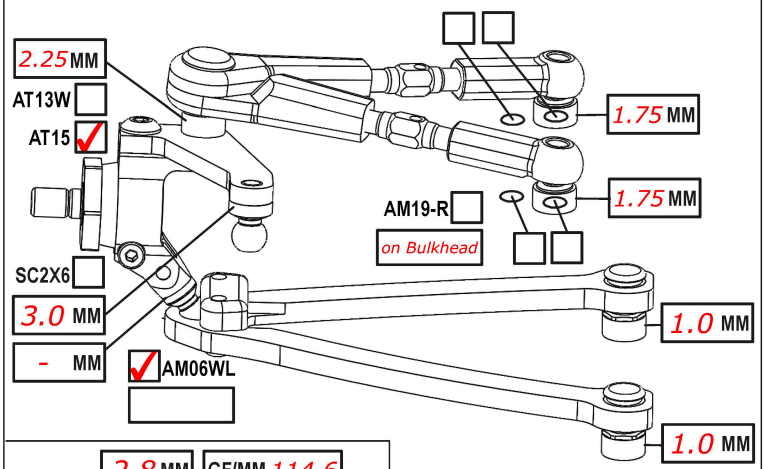

CAMBER ANGLE /° 1.0
CASTER ANGLE /° 2
TOE ANGLE /° 3.25
RIDE HEIGHT / MM 5.2
DOWNSTOP / MM 4.6
UPSTOP / MM on plastic
ANTI-ROLL BAR Ø / MM 1.0
ARB STIFFENER 1/4 ☐ 1/2 ☐ 3/4 ☐ 1 ☐
LOWER ARM EXTENSION / MM 0
STEER. ARM AM23-1 ☑
2ND SPRING SPR-P2 ☐ P1 ☐
WHEEL SPACER / MM -
DRIVE DIFF ☑ GD2B-R
DRIVE POS. DOWN ☐ UP ☑ +1 ☐
DIFF OIL 10k | DIFF SHIMS SH5X7X0.4

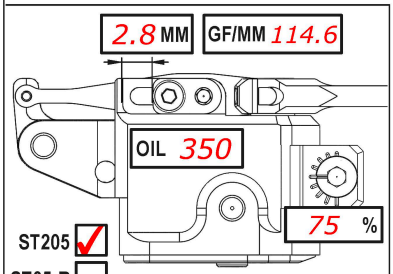

SHOCKS SETUP
DAMPER D4 ☑
ROTOR 2 HOLES ☑
SPRING STD ☑ S ☐
SRS/RHS ARR. I ☑ II ☐
PSS SETUP 30% ☐ 25% ☐ 15% ☐
DAMPING LINEAR ☑ P1 ☐ P2 ☐
DAMPER SPACER / MM SH0.5
C45 YES ☑ NO ☐

CHASSIS FLEX AND WEIGHT SETTINGS

BW22-R ☐ ABH ☐ BW52-R ☐
ABH ☐ BW22-R ☐ BW52-R ☐

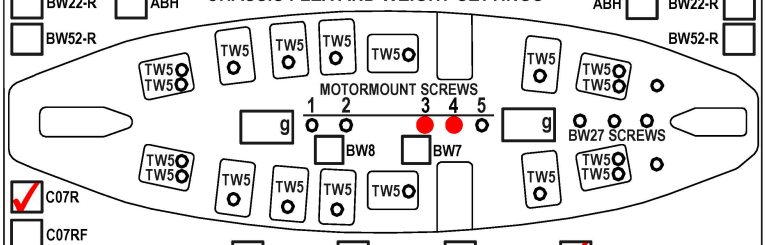

C07R ☑
C07RF ☐
LOWER DECK C01B-RAF ☐ C01B-RC ☐ C01B-RS ☐ C01B-RSL ☑ OTHER

BUMPER TOP PLATE CUT ☐ FRONT BUMPER P15L ☐ OTHER MXLR M-Flex

C26 ☐ C26 ☐

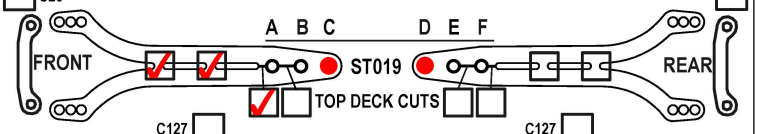

TOP DECK CUTS ☐ ☐

FRONT TOP DECK C127 ☐ C127S ☑ OTHER
REAR TOP DECK C127 ☐ C127S ☐ OTHER
SINGLE TOP DECK C27MMX ☐ OTHER
BELT TESIONER AM279 ☐ OTHER

TIRES Hudy A2-36
INSERTS
SIDEWALLS GLUE Ø / MM F R
ADDITIVE MR33 V3
TOTAL WEIGHT 1324 WEIGHT DISTRIBUTION % F R
NOTES: 1 time additive / 75deg



TIME MIN. F 15 R 15

MOTOR LATERAL SHIFT / MM 1.75
MOTOR Hobbywing G5 13,5T
SPUR 102 PINION 47 RATIO 4.12
BODY ZooRacing Wolverine MAX 0.4mm
WING Twister 0.5
ESC Hobbywing G3X
ESC SETTINGS Blinky
BEST LAPTIME QUALIF./FINAL POSITION 27 / 26

SERVO MKS HBL575 SL
SERVO HORN / HEIGT MXLR 17mm
ACKERMANN POSITION reward
STEER. TRAVEL IN 22 OUT
BATTERY Team EAM 8000
RECEIVER Sanwa RX493i
RADIO Sanwa M17

BODY POSITION



BOTTOM WINDW LINE TO BODY POST DISTANCE
FRONT BODY POSTS
ORING YES ☑ NO ☐
HOLE # 3
WINGLETS YES ☑ NO ☐
REAR HRB SETTING / MM 3,5
SURFACE TO WING MOUNT DISTANCE / MM

COMMENTS:

20g. MXLR Tungsten under receiver / 15g MXLR Tungsten in front of Servo / MXLR M-FlexBumper / MXLR Alloy Servo Arm / MXLR Front Body Support / MXLR Rear Body Support / MXLR FAN BOOSTER