



TRACK SURFACE		ASPHALT	☒	CARPET	☐
TRACK LAYOUT	TECHNICAL	☐	MIXED	☒	FAST
TRACTION	LOW	☐	MEDIUM	☒	HIGH

REAR

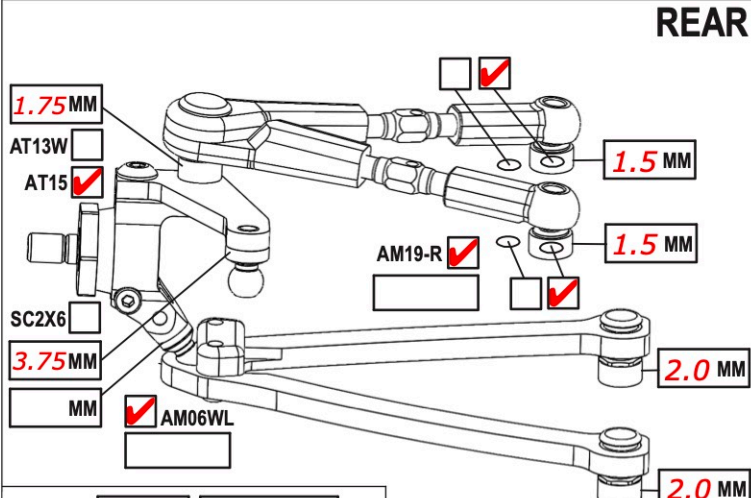

CAMBER ANGLE / °	1.0
CASTER ANGLE / °	-3.0
TOE ANGLE / °	2.25
RIDE HEIGHT / MM	4.8
DOWNSTOP / MM	4.4
ANTI-ROLL BAR Ø / MM	1.1
ARB STIFFENER 1/4 ☐ 1/2 ☐ 3/4 ☐ 1 ☐	
LOWER ARM EXTENSION / MM	0
STEER. ARM AM23-1 ☒	
2ND SPRING SPR-P2 ☐ P1 ☐	
WHEEL SPACER / MM	0.5
DRIVE DIFF ☒	GD2B-R
DRIVE POSITION DOWN ☐ UP ☒ +1 ☐	
DIFF OIL MR33 8K	DIFF SHIMS 5x7x0.4

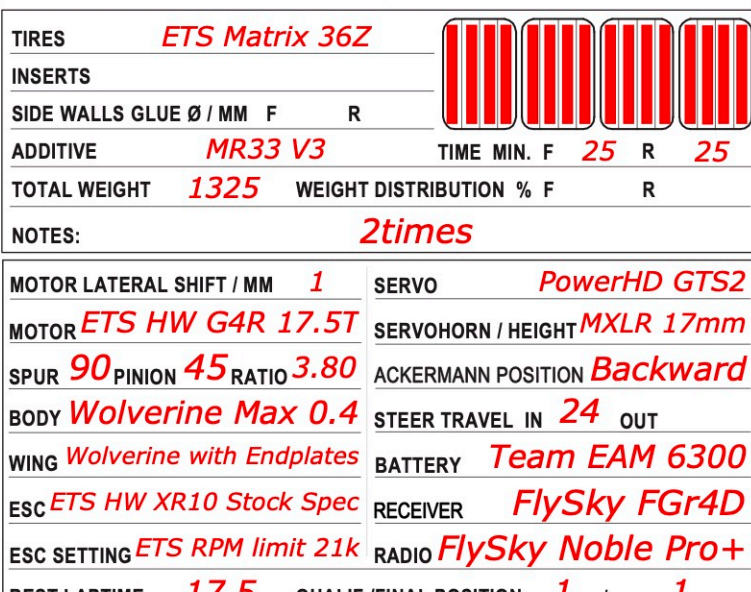

**SURFACE TO WING
MOUNT DISTANCE / MM**

- Option Parts: AT15, SB3X5AL and SB3X7AL on top of the car, OR14V, AT144, ABH, C07RF, ST24S, ST110 in front of Motormount and 2x TW5 behind

- MXLR Parts: MAX-03-001, MAX-03-005, MAX-09-002, MAX-09-013, MAX-09-025, MAX-09-026