


NAME **Max Mächler**
 COUNTRY **Germany**
 RACE **DMC German Nats**
 TRACK **Marktoberdorf**

DATE **08.03.2026** TEMPERATURE AIR / TRACK °C / °C
 ASPHALT OUTDOOR INDOOR CARPET
 TRACK CONDITION BUMPY FLAT TECHNICAL MIXED FAST
 TRACTION LOW MEDIUM HIGH

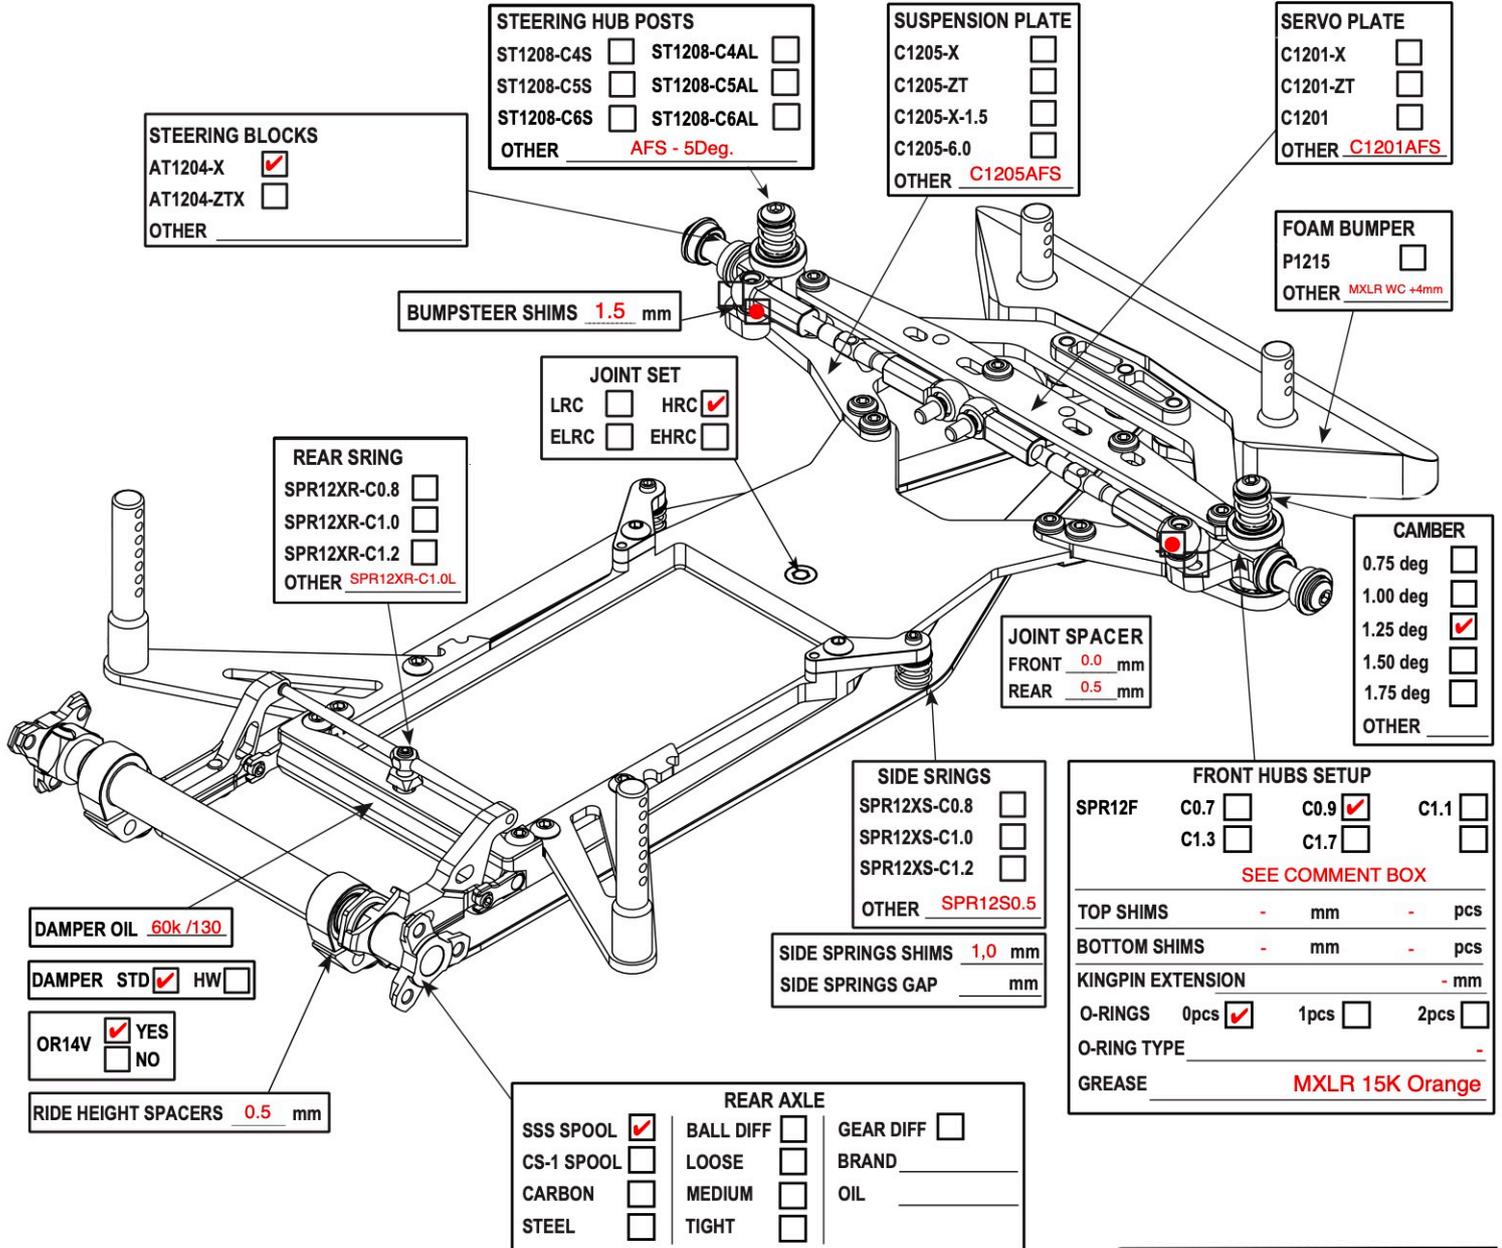

FRONT RIDE HEIGHT (FRH)	3.2 mm	FRONT DROOP (FD)	1.0 mm
REAR RIDE HEIGHT (RRH)	3.4 mm	REAR DOWNSTOP (RD)	2.40 mm
GAP UNDER DAMPER (GUD)	1.0 mm	TRACK WIDTH	
DOWNSTOP NUT GAP (DNG)	0.6 mm	FRONT	167.50 mm
SPRING ROD HEIGHT (SRH)	1.65 mm	REAR	171.00 mm

BATTERY **Team EAM 9200**
BATTERY PLUGS FRONT BACK
SERVO POSITION LEFT RIGHT
ESC POSITION LEFT RIGHT

SERVO **MKS HV50P**
SERVO SAVER Xray Adjustable - **INSIDE**
SHIMS ON SERVO SAVER **0 mm**
TOE OUT **1,0 °**
STEER. TRAVEL IN **22 °** OUT **°**

TIRES	FRONT	REAR	FRONT REAR	
BRAND	HotRace	HotRace		
TYPE	T-Foam Soft Rim	T-Foam Soft Rim	FRONT	REAR
DIAMETER	40.5 mm	41.5 mm		
ADDITIVE	MXLR SideBite F-1	MXLR SideBite F-1	TIME 8 min	TIME 30 min

MOTOR **Hobbywing G4R 13,5T** **TOTAL WEIGHT** **732 g**
SPUR 72 PINION 39 ROLLOUT 70.62 **F/R WEIGHT DISTRIBUTION** %
ESC **Hobbywing XR10 PRO 1S HD** **RECEIVER** **Sanwa RX-493**
ESC SETTING **Blinky** **RADIO** **Sanwa M17S**
BODY **Montech M20** **REAR BODY HEIGHT (SIDE DAMS)** **82 mm**
BEST LAP TIME **9,6** **QUALIF./ FINAL POSITION** **3 / 3**

COMMENTS:
 AM1204XT Outer Frame / No SH1.5W between C1204 & C1205AFS. / SB3X7AL Screws for mounting of the rear Wheels.
 MXLR A12X Fan Mount + MXLR FanBooster in combo with AXON 30mm HYPER Fan.
 MXLR FlexBumper WC Edition (4mm spacers used).
 MXLR Carbon Electronics Plate for A12X.
 MXLR 12g Tungsten under Receiver / 5g in front of ESC / 5g in front of receiver.