


NAME **Lucas Urbain**
COUNTRY **Luxembourg**
RACE **ETS Rnd3**
TRACK **LMCC**


DATE **07.09.2025**

TEMP. °C AIR / TRACK /
TRACK SURFACE ASPHALT ☒ CARPET ☐
TRACK LAYOUT TECHNICAL ☐ MIXED ☒ FAST ☐
TRACTION LOW ☐ MEDIUM ☒ HIGH ☒

FRONT


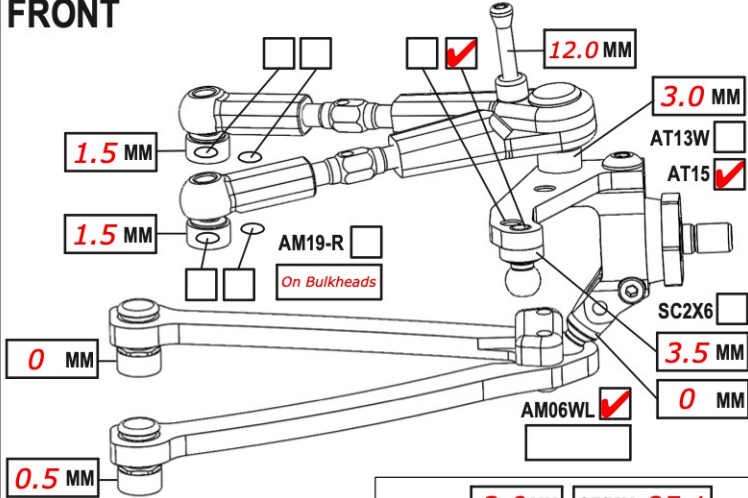


CAMBER ANGLE / ° **1.5**
CASTER ANGLE / ° **4.0**
TOE ANGLE / ° **1.2**
RIDE HEIGHT / MM **4.6**
DOWNSTOP / MM **6.0**
ANTI-ROLL BAR Ø / MM **1.1**
ARB STIFFENER 1/4 ☐ 1/2 ☐ 3/4 ☐ 1 ☐
LOWER ARM EXTENSION / MM **0**
STEER. ARM AM14LS ☒
2ND SPRING SPR-P2 ☐ P1 ☐
WHEEL SPACER / MM **0**
DRIVE SPOOL ☒ DIFF ☐
DRIVE POSITION DOWN ☒ UP ☐ +1 ☐
DIFF OIL ☐ DIFF SHIMS ☐

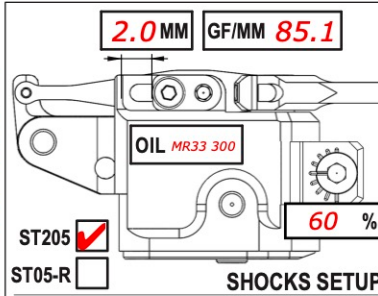



SHOCKS SETUP
DAMPER D4 ☒
ROTOR 2 HOLES ☒
SPRING STD ☒ S ☐
SRS/RHS ARR. I ☒ II ☐
PSS SETUP 30% ☒ 25% ☐ 15% ☐
DAMPING LINEAR ☐ P1 ☐ P2 ☒
DAMPER SPACER / MM **ST237**
C45 YES ☐ NO ☒

REAR

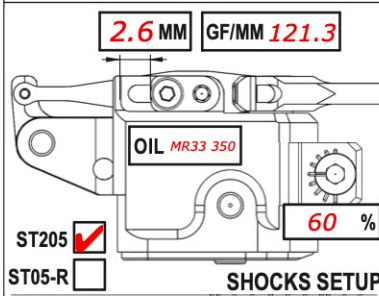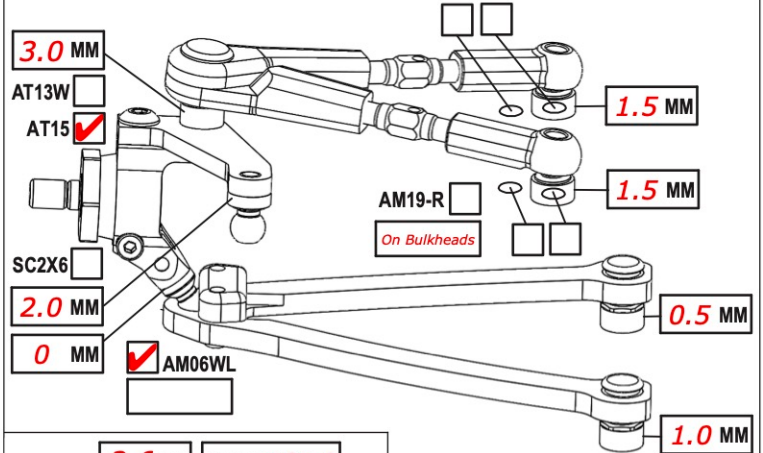

SHOCKS SETUP
DAMPER D4 ☒
ROTOR 2 HOLES ☒
SPRING STD ☒ S ☐
SRS/RHS ARR. I ☒ II ☐
PSS SETUP 30% ☐ 25% ☐ 15% ☐
DAMPING LINEAR ☒ P1 ☐ P2 ☐
DAMPER SPACER / MM **ST237**
C45 YES ☒ NO ☐

CAMBER ANGLE / ° **1.5**
CASTER ANGLE / ° **3.0**
TOE ANGLE / ° **2.5**
RIDE HEIGHT / MM **5.0**
DOWNSTOP / MM **4.6**
ANTI-ROLL BAR Ø / MM **1.1**
ARB STIFFENER 1/4 ☐ 1/2 ☐ 3/4 ☐ 1 ☐
LOWER ARM EXTENSION / MM **-1**
STEER. ARM AM23-1 ☒
2ND SPRING SPR-P2 ☐ P1 ☐
WHEEL SPACER / MM **0**
DRIVE DIFF ☒
DRIVE POSITION DOWN ☒ UP ☐ +1 ☐
DIFF OIL **MR33 8K** DIFF SHIMS **SH5x7x0.4**

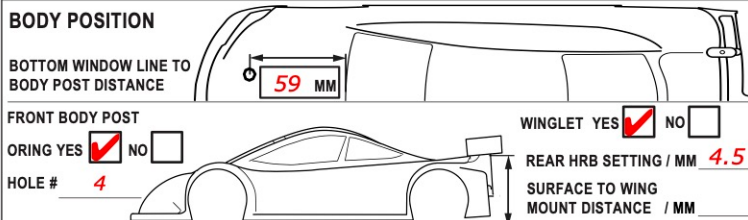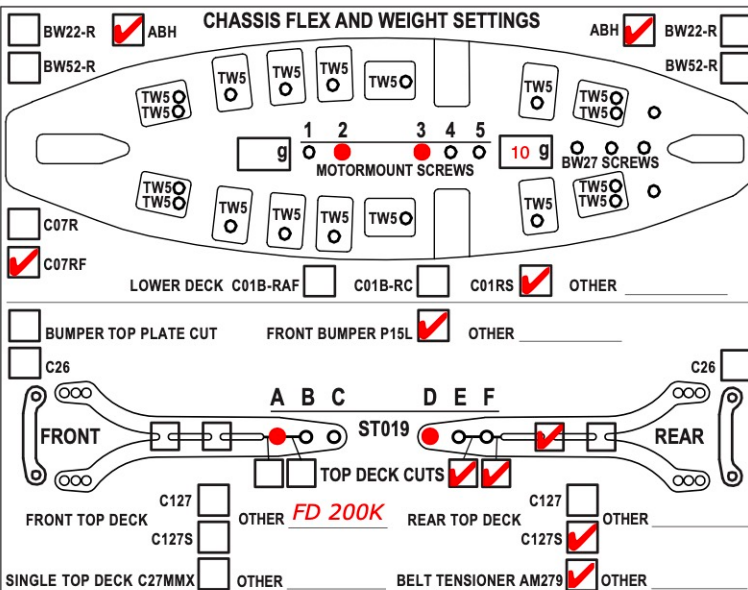

TIRES **Matrix D36**
INSERTS
SIDE WALLS GLUE Ø / MM F R
ADDITIVE **MR33 V3** TIME MIN. F **20** R **20**
TOTAL WEIGHT **1305** WEIGHT DISTRIBUTION % F **49** R **51**

NOTES:
MOTOR LATERAL SHIFT / MM **0** SERVO **MKS HBL575SL**
MOTOR **ORCA Modtreme3 4.5t** SERVOHORN / HEIGHT **17mm**
SPUR **112** PINION **29** RATIO **7.34** ACKERMANN POSITION **Rearward**
BODY **Speciale 0.4** STEER TRAVEL IN **25** OUT **16**
WING **Wolverine 0.4** BATTERY **ORCA 6390**
ESC **ORCA Oe1 MKII** RECEIVER **RX 492**
ESC SETTING RADIO **Sanwa M17**
BEST LAPTIME **16.4** QUALIF./FINAL POSITION **1st / 2nd**

COMMENTS:
AT15 + SB3X5AL Screws on top of the car
AT21-Ti - BS1-Ti - ST03-Ti
Up travel limiters:
32.0mm front
32.0mm rear