

NAME **Roman Borschel**

RACE **TOS**

TRACK **Augsburg**

COUNTRY **Germany**

CLASS **17.5T**

DATE **3./4.1.2026**

TEMP. °C AIR / TRACK **20** /

TRACK SURFACE

ASPHALT ☐

CARPET ☒

TRACK LAYOUT

TECHNICAL ☐

MIXED ☒

FAST ☐


TRACTION

LOW ☐

MEDIUM ☒

HIGH ☐

FRONT

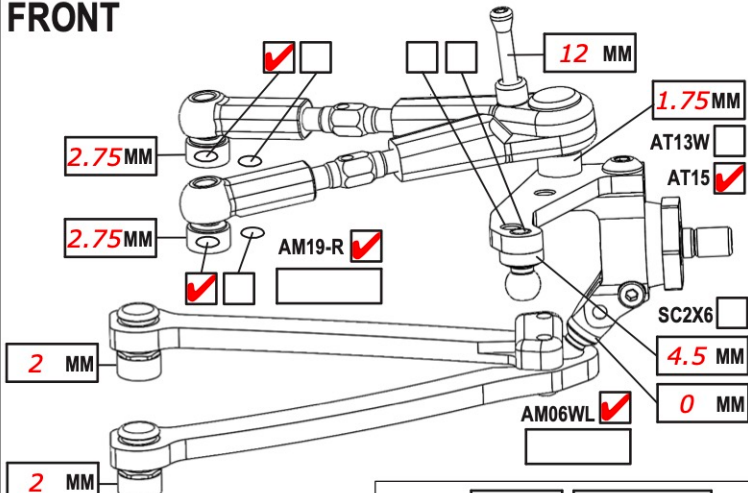

CAMBER ANGLE / ° **2**

CASTER ANGLE / ° **4**

TOE ANGLE / ° **1**

RIDE HEIGHT / MM **5.0**

DOWNSTOP / MM **5.6**

UPSTOP / MM **-**

ANTI-ROLL BAR Ø / MM **1.2**

ARB STIFFENER 1/4 ☐ 1/2 ☐ 3/4 ☐ 1 ☐

LOWER ARM EXTENSION / MM **0**

STEER. ARM AM14LS ☐ **AM14H**


2ND SPRING SPR-P2 ☐ P1 ☐

WHEEL SPACER / MM

DRIVE SPOOL ☒ DIFF ☐

DRIVE POSITION DOWN ☒ UP ☐ +1 ☐

DIFF OIL ☐ DIFF SHIMS ☐

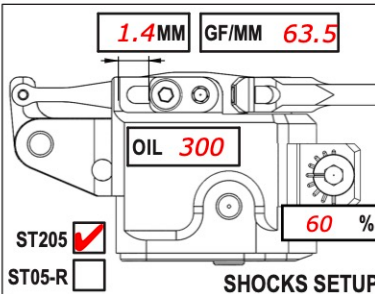

SHOCKS SETUP

DAMPER D4 ☒

ROTOR 2 HOLES ☒

SPRING STD ☐ S ☒

SRS/RHS ARR. I ☒ II ☐


PSS SETUP 30% ☐ 25% ☐ 15% ☐

DAMPING LINEAR ☐ P1 ☐ P2 ☒

DAMPER SPACER / MM **ST237**

C45 YES ☐ NO ☒

REAR

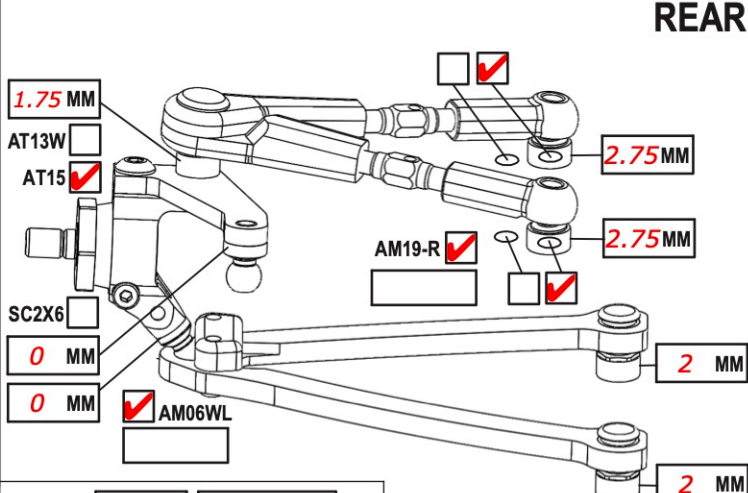

CAMBER ANGLE / ° **2**

CASTER ANGLE / ° **1**

TOE ANGLE / ° **2.5**

RIDE HEIGHT / MM **5.2**

DOWNSTOP / MM **5.0**

UPSTOP / MM **-**

ANTI-ROLL BAR Ø / MM **1.3**

ARB STIFFENER 1/4 ☐ 1/2 ☐ 3/4 ☐ 1 ☐

LOWER ARM EXTENSION / MM **0**

STEER. ARM AM23-1 ☒


2ND SPRING SPR-P2 ☐ P1 ☐

WHEEL SPACER / MM

DRIVE DIFF ☒

DRIVE POSITION DOWN ☒ UP ☐ +1 ☐

DIFF OIL **7k** DIFF SHIMS **SH5X7X0.4**

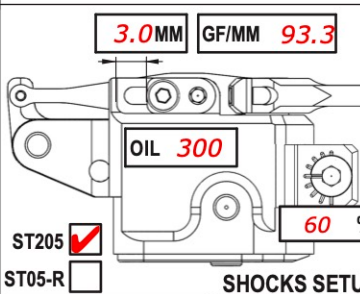

SHOCKS SETUP

DAMPER D4 ☒

ROTOR 2 HOLES ☒

SPRING STD ☐ S ☒

SRS/RHS ARR. I ☒ II ☐


PSS SETUP 30% ☐ 25% ☐ 15% ☐

DAMPING LINEAR ☐ P1 ☐ P2 ☒

DAMPER SPACER / MM **ST237**

C45 YES ☒ NO ☐

CHASSIS FLEX AND WEIGHT SETTINGS

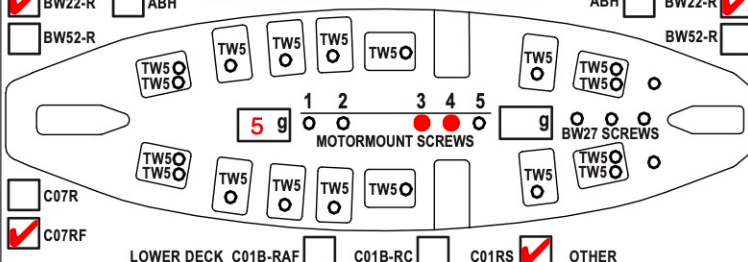

FRONT TOP DECK C127 ☐ OTHER ☐

REAR TOP DECK C127 ☐ OTHER ☐

SINGLE TOP DECK C27MMX ☐ OTHER ☐

BELT TENSIONER AM279 ☒ OTHER ☐


FRONT TOP DECK C127S ☒ OTHER ☐

REAR TOP DECK C127S ☒ OTHER ☐

SINGLE TOP DECK C27MMX ☐ OTHER ☐

BELT TENSIONER AM279 ☒ OTHER ☐

BODY POSITION

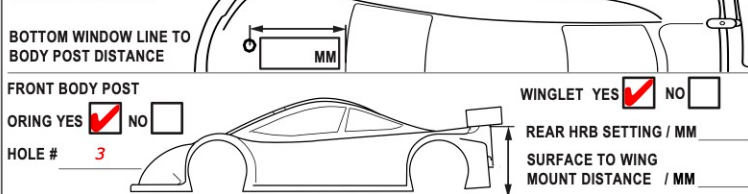

TIRES **Matrix MX-EPCZ028**

INSERTS **STD**

SIDE WALLS GLUE Ø / MM F **58** R

ADDITIVE **MR33 V5**

TOTAL WEIGHT **1305**

WEIGHT DISTRIBUTION % F **50** R **50**

NOTES:

MOTOR LATERAL SHIFT / MM **1**

MOTOR **HW-30401760 G4R 17.5T**

SPUR **102** PINION **43** RATIO **4.51**

BODY **Zooracing Wolverine 0.4**

WING **Twister 0.5**

ESC **HW-30112103 Stock Spec Regler**

ESC SETTING

BEST LAPTIME **11,2**

QUALIF./FINAL POSITION **5** / **5**

SERVO **Power HD S15**

SERVOHORN / HEIGHT **19mm**

ACKERMANN POSITION **Back**

STEER TRAVEL IN **26** OUT

BATTERY **Team EAM 5200**

RECEIVER **Sanwa RX-482**

RADIO **Sanwa M17**

COMMENTS:

Option Parts: BEL351LF, SB3X5AL, SB3X7AL, AT15, BW7, BW8, BW22R, C07RF, BS1-Ti, AT144, OR14V
MAX-09-025, MAX-00-026, MAX-09-028