


NAME **Max Mächler**
 COUNTRY **Netherlands**
 RACE **Pre-Test & TOS**
 TRACK **AMCA Apeldoorn**


DATE **01-03.05.2025**

TEMP. °C AIR / TRACK /
 TRACK SURFACE ASPHALT ☒ CARPET ☐
 TRACK LAYOUT TECHNICAL ☐ MIXED ☐ FAST ☒
 TRACTION LOW ☒ MEDIUM ☒ HIGH ☐

FRONT

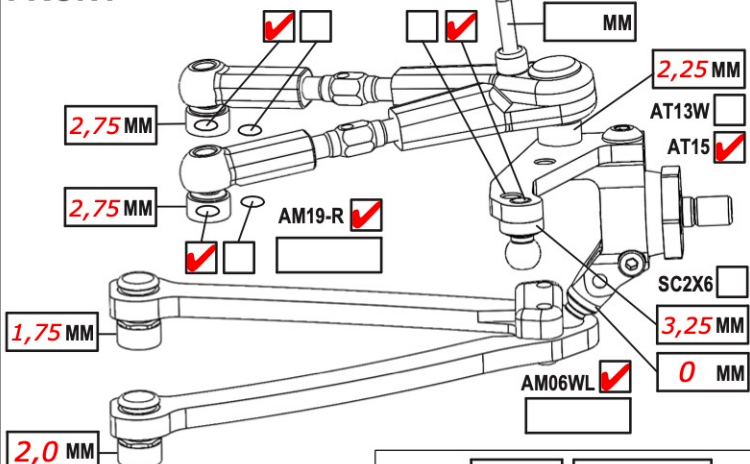


CAMBER ANGLE / ° **1,8**
 CASTER ANGLE / ° **4,0**
 TOE ANGLE / ° **1,0**
 RIDE HEIGHT / MM **4,8**
 DOWNSTOP / MM **5,6**
 ANTI-ROLL BAR Ø / MM **1,0**
 ARB STIFFENER 1/4 ☐ 1/2 ☐ 3/4 ☐ 1 ☐
 LOWER ARM EXTENSION / MM **0**
 STEER. ARM AM14LS ☒
 2ND SPRING SPR-P2 ☐ P1 ☐
 WHEEL SPACER / MM **0**
 DRIVE SPOOL ☒ DIFF ☐
 DRIVE POSITION DOWN ☐ UP ☒ +1 ☐
 DIFF OIL ☐ DIFF SHIMS ☐




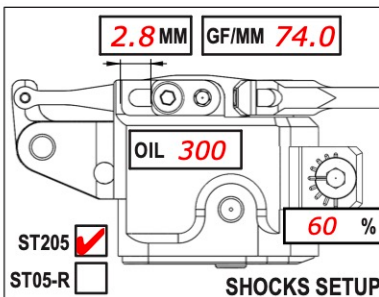


ST205 ☒ ST05-R ☐ SHOCKS SETUP
 DAMPER D4 ☒
 ROTOR 2 HOLES ☒
 SPRING STD ☐ S ☒
 SRS/RHS ARR. I ☒ II ☐
 PSS SETUP 30% ☐ 25% ☐ 15% ☐
 DAMPING LINEAR ☐ P1 ☐ P2 ☒
 DAMPER SPACER / MM **ST237**
 C45 YES ☐ NO ☒

REAR

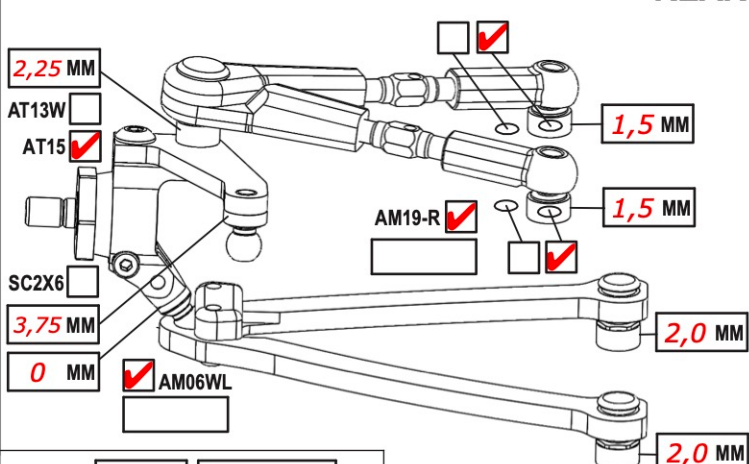

CAMBER ANGLE / ° **1,8**
 CASTER ANGLE / ° **-3 short**
 TOE ANGLE / ° **3,0**
 RIDE HEIGHT / MM **5,0**
 DOWNSTOP / MM **4,6**
 ANTI-ROLL BAR Ø / MM **1,1**
 ARB STIFFENER 1/4 ☐ 1/2 ☐ 3/4 ☐ 1 ☐
 LOWER ARM EXTENSION / MM **0**
 STEER. ARM AM23-1 ☒
 2ND SPRING SPR-P2 ☐ P1 ☐
 WHEEL SPACER / MM **0**
 DRIVE DIFF ☒ **GD2B-R**
 DRIVE POSITION DOWN ☐ UP ☒ +1 ☐
 DIFF OIL **7,5K** DIFF SHIMS **SH5X7X0.4**

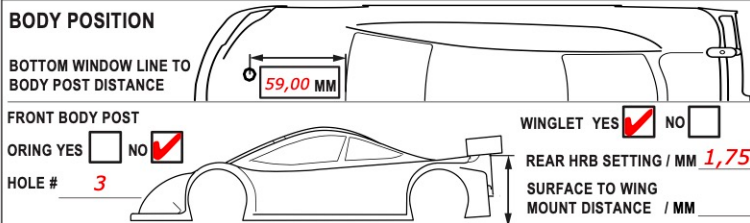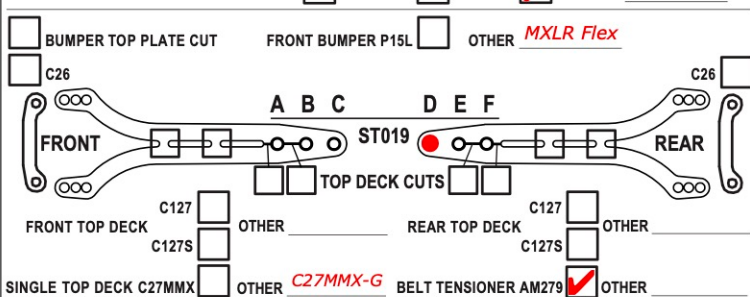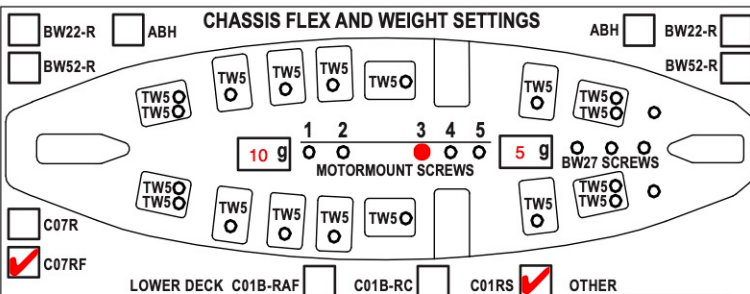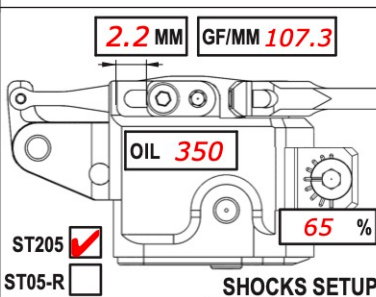

TIRES **ETS EPA 36**
 INSERTS **std.**
 SIDE WALLS GLUE Ø / MM F - R -
 ADDITIVE **ETS V3** TIME MIN. F **15** R **15**
 TOTAL WEIGHT **1320** WEIGHT DISTRIBUTION % F **50** R **50**

NOTES:

MOTOR LATERAL SHIFT / MM **1,75** SERVO **MKS HBL575 SL**
 MOTOR **Hobbywing G4R 17,5T ETS** SERVOHORN / HEIGHT **MXLR 17mm**
 SPUR **90** PINION **45** RATIO **3.80** STEER TRAVEL IN **24** OUT
 BODY **ZooRacing Wolverine 0,4** BATTERY **Team EAM 6300**
 WING **Twister 0,5** RECEIVER **Sanwa RX-493**
 ESC **Hobbywing XR10 Stock Spec G2** RADIO **Sanwa M17 Limited**
 ESC SETTING **ETS RPM Limit 21K**
 BEST LAPTIME **16,0** QUALIF./FINAL POSITION /

COMMENTS:

10g MXLR Tungsten on front Servo Case. 15g MXLR Tungsten under receiver.

MXLR FlexBumper / MXLR Alloy Servo Arm / MXLR Front Body Support / OR14V / SB3X5AL / C27MMX-G / BEL351 LF / FSS Steering set

